

PLCC Series

2835 1W HV Series White

Datasheet




Outdoor Lighting


Automotive Lighting


General Lighting


Indoor Lighting


Signal Lighting

Introduction :

Ultra high luminous efficacy, combined with the flexibility in design due to its slim and miniature size, PLCC LED Series are optimized to be used as lighting for signboard.

Description :

- Best luminous and color uniformity
- Enables halogen and CDM replacement
- The article itself presents the actual color.

Feature and Benefits :

- High luminous Intensity and high efficiency
- Based on Blue : InGaN technology
- Wide viewing angle : 120°
- Excellent performance and visibility
- Suitable for all SMT assembly methods
- IR reflow process compatible
- Environmental friendly; RoHS compliance



Table of Contents



General Information


Ordering Code Format (CRI80)

2	T	0 3	0 1	x W	x x	0 0 0	x x x
X1	X2	X3-X4	X5-X6	X7-X8	X9-X10	X11-X13	X14-X16

X1		X2		X3-X4		X5-X6		X7-X8	
Type		Component		Series		Wattage		Color	
2	Emitter	T	PLCC	03	3528	01	1W	CW	Cool White
								NW	Neutral White
								WW	Warm White

X9-X10		X11-X13		X14-X16	
Internal code		PCB Board		Serial Number	
-	-	000	-	-	-

Ordering Code Format (CRI90)

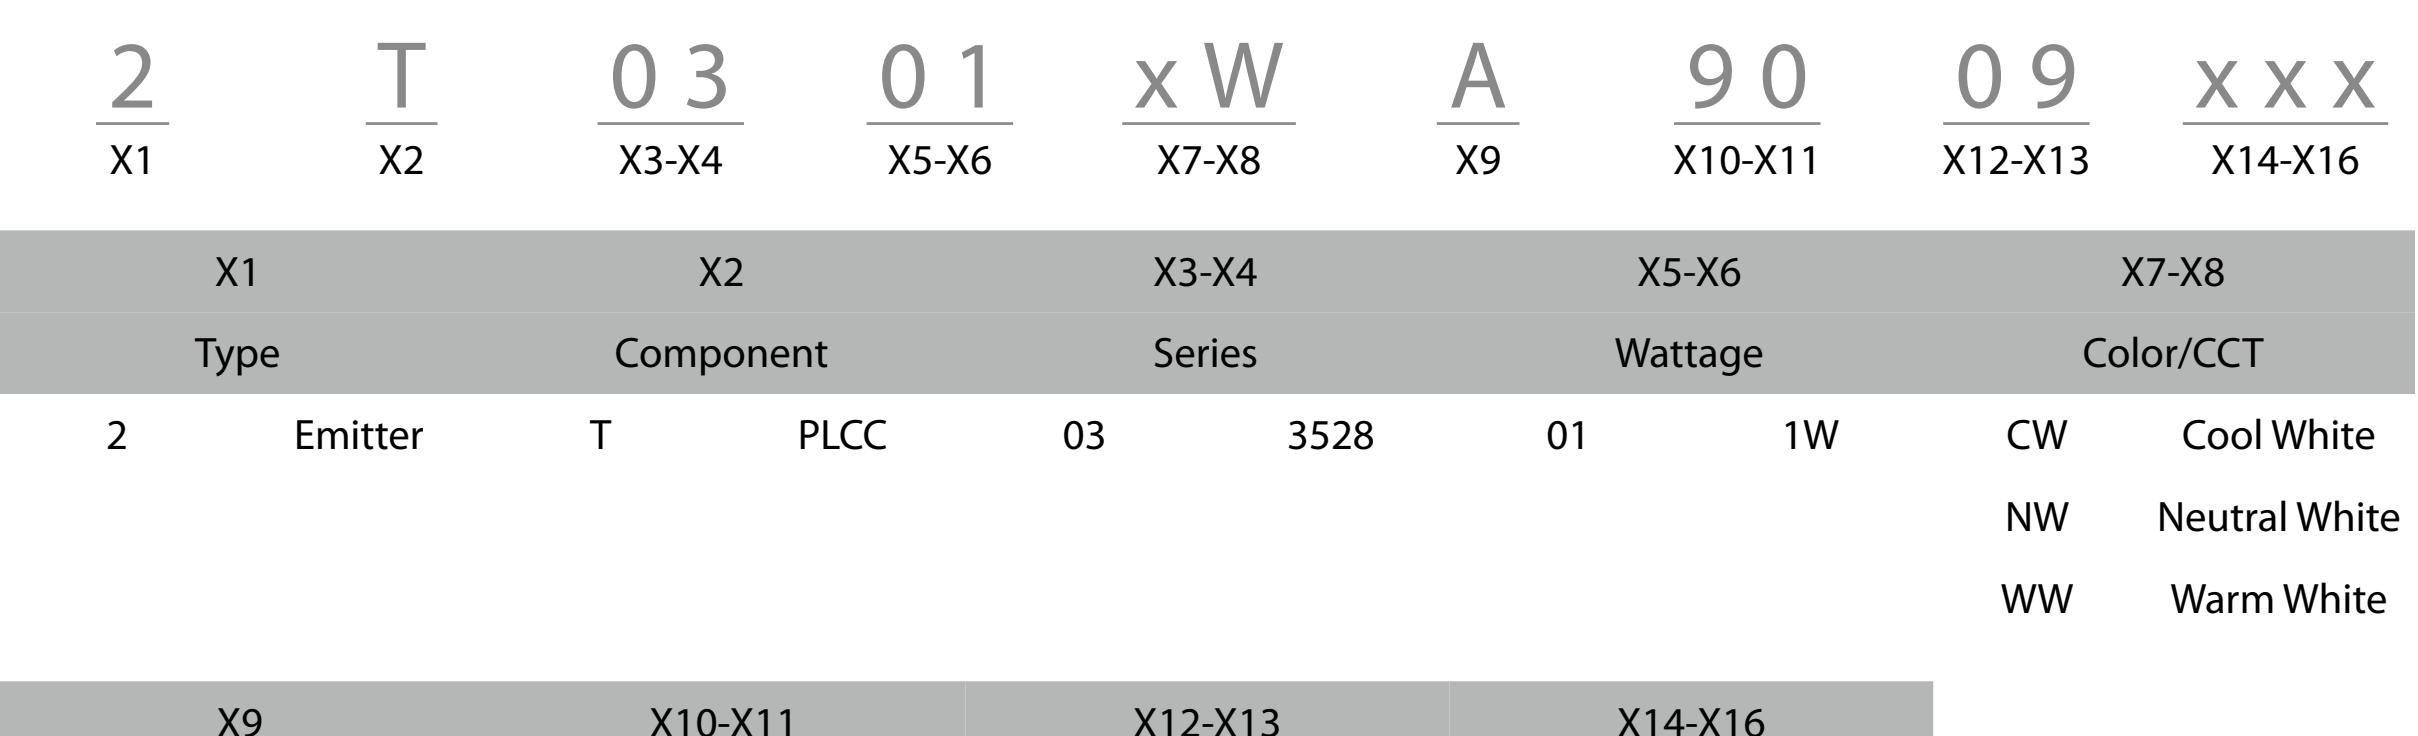

2	T	0 3	0 1	x W	A	9 0	0 9	x x x
X1	X2	X3-X4	X5-X6	X7-X8	X9	X10-X11	X12-X13	X14-X16

X1		X2		X3-X4		X5-X6		X7-X8	
Type		Component		Series		Wattage		Color/CCT	
2	Emitter	T	PLCC	03	3528	01	1W	CW	Cool White
								NW	Neutral White
								WW	Warm White

X9		X10-X11		X12-X13		X14-X16	
BIN		CRI		Voltage		Serial Number	
A	Ansi	90	CRI>90	09	9V	-	-



Absolute Maximum Ratings

Absolute maximum ratings (T_a=25°C)

Parameter	Symbol	Value	Units
Forward Current	I_F	120	mA
Pulse Forward Current (tp≤100μs, Duty cycle=0.25)	I_{pulse}	150	mA
Reverse Curent	I_R	10	uA
Reverse Voltage	V_R	5	V
LED Junction Temperature	T_J	125	°C
Operating Temperature	-	-40 ~ +85	°C
Storage Temperature	-	-40 ~ +125	°C
ESD Sensitivity (HBM)	V_B	2,000	V
Soldering Temperature	T_s	Reflow Soldering : 255~260°C/10~30sec Manual Soldering : 350°C/3sec	

Notes:
1. Proper current derating must be observed to maintain junction temperature below the maximum at all time.
2. LEDs are not designed to be driven in reverse bias.

Characteristics

Parameter	Symbol	Value	Units
Viewing Angle (Typ.)	$2\Theta_{1/2}$	120	Degree
Thermal resistance	-	10	°C/W
CCT (Cool White) (Neutral White) (Warm White)	-	2,700 3,000 3,500 4,000 5,000 5,700 6,500	K
JEDEC Moisture Sensitivity	-	Level 2a **Floor Life** Conditions: ≤30°C / 60% RH **Soak Requirements(Standard)** Time (hours): 120+1/-0 Conditions: 60°C / 60% RH	-

Notes:
1. $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is half of the axial luminous intensity.
2. CIE_x/y tolerance: ±0.005.



Electro - Optical Characteristics (3000K)

I_F=100mA and T_J=25˚C

CRI	If (mA)	Vf (V)	Power (W)	lm	lm/W
80	20	8.24	0.165	26.4	160
	40	8.58	0.343	49.7	145
	60	8.77	0.526	70.3	134
	80	8.99	0.719	90.8	126
	100 (Typ.)	9.16	0.916	104.9	114
	120	9.34	1.121	124.8	111

CRI	If (mA)	Vf (V)	Power (W)	lm	lm/W
90	20	8.25	0.165	22.6	137
	40	8.61	0.344	42.3	123
	60	8.89	0.533	60.7	114
	80	9.06	0.725	74.7	103
	100 (Typ.)	9.25	0.925	91.6	99
	120	9.46	1.135	99.5	88

Note:
LM Values are for representative reference only.



Luminous Flux Characteristic

Luminous Flux Characteristics, I_F=100mA and T_J=25°C

Color	CRI	Group	Min. Luminous Flux(lm)	Max. Luminous Flux(lm)	Forward Current (mA)	Order Code
Cool White	80	U3	100	110	100	2T0301CW11000011
		V1	110	120		
		V2	120	130		
Neutral White		U3	100	110		2T0301NW11000011
		V1	110	120		
		V2	120	130		
Warm White		U2	90	100		2T0301WW11000011
		U3	100	110		
		V1	110	120		

Color	CRI	Group	Min. Luminous Flux(lm)	Max. Luminous Flux(lm)	Forward Current (mA)	Order Code
Cool White	90	U1	86.5	90	100	2T0301CWA9009001
		U2	90	100		
		U3	100	110		
		V1	110	120		
Neutral White		U1	86.5	90		2T0301NWA9009001
		U2	90	100		
		U3	100	110		
		V1	110	120		
Warm White		T3	80	86.5		2T0301WWA9009001
		U1	86.5	90		
		U2	90	100		
		U3	100	110		

Notes:
1. The luminous flux performance is guaranteed within published operating conditions. Edison Opto maintains a tolerance of ±10% on flux measurements.
2. Color Rendering index CRI tolerance: ±2.




Voltage Bin Structure

Group	Min. Voltage (V)	Max. Voltage (V)V
V8B	8.5	9.0
V9A	9.0	9.5
V9B	9.5	10.0
V10	10.0	11.0


Note:
Forward voltage measurement allowance is ± 0.2V.




Mechanical Dimensions

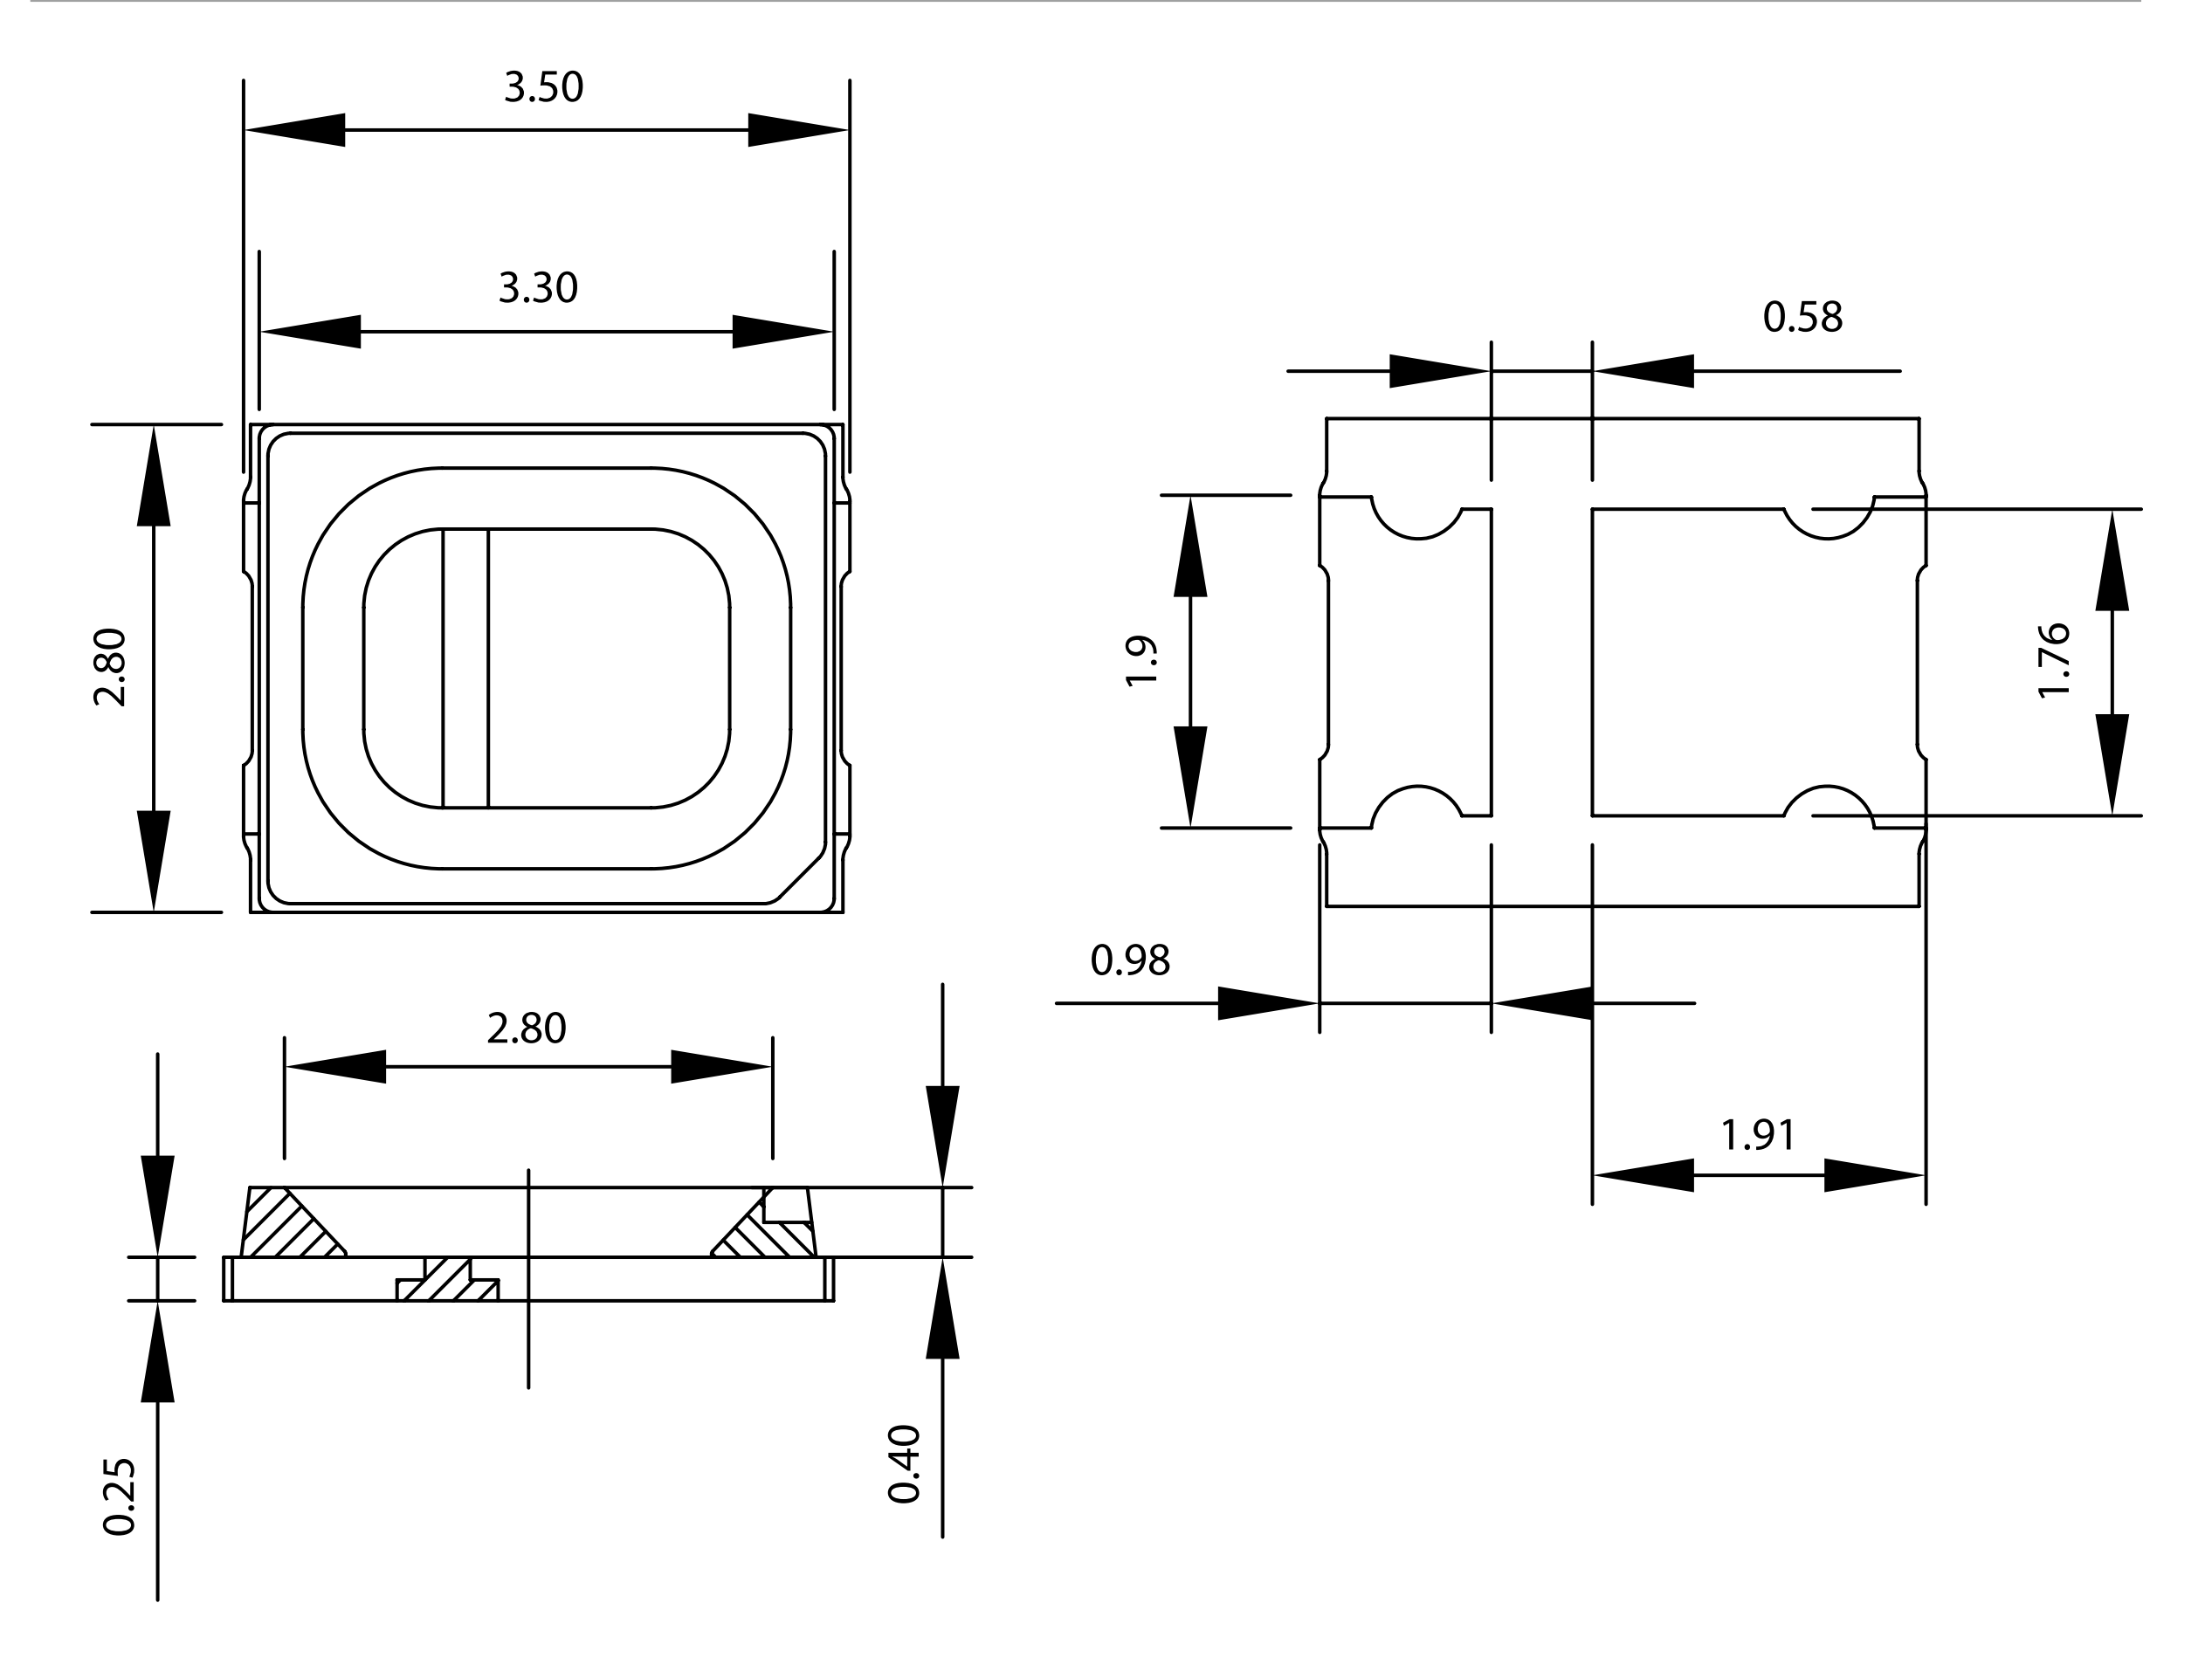

Circuit

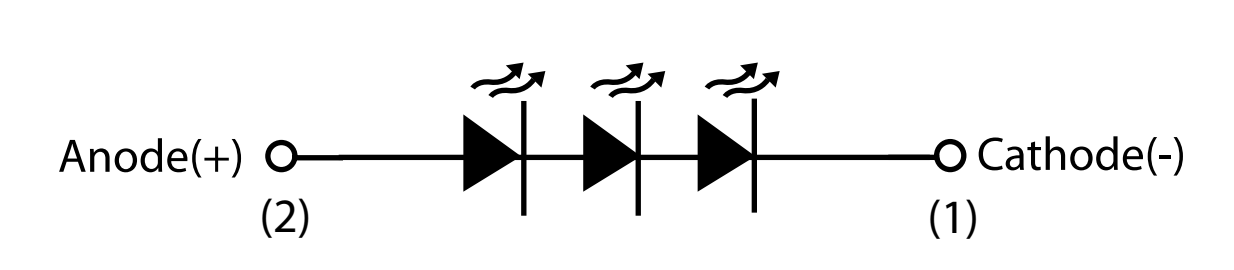

Solder Pad

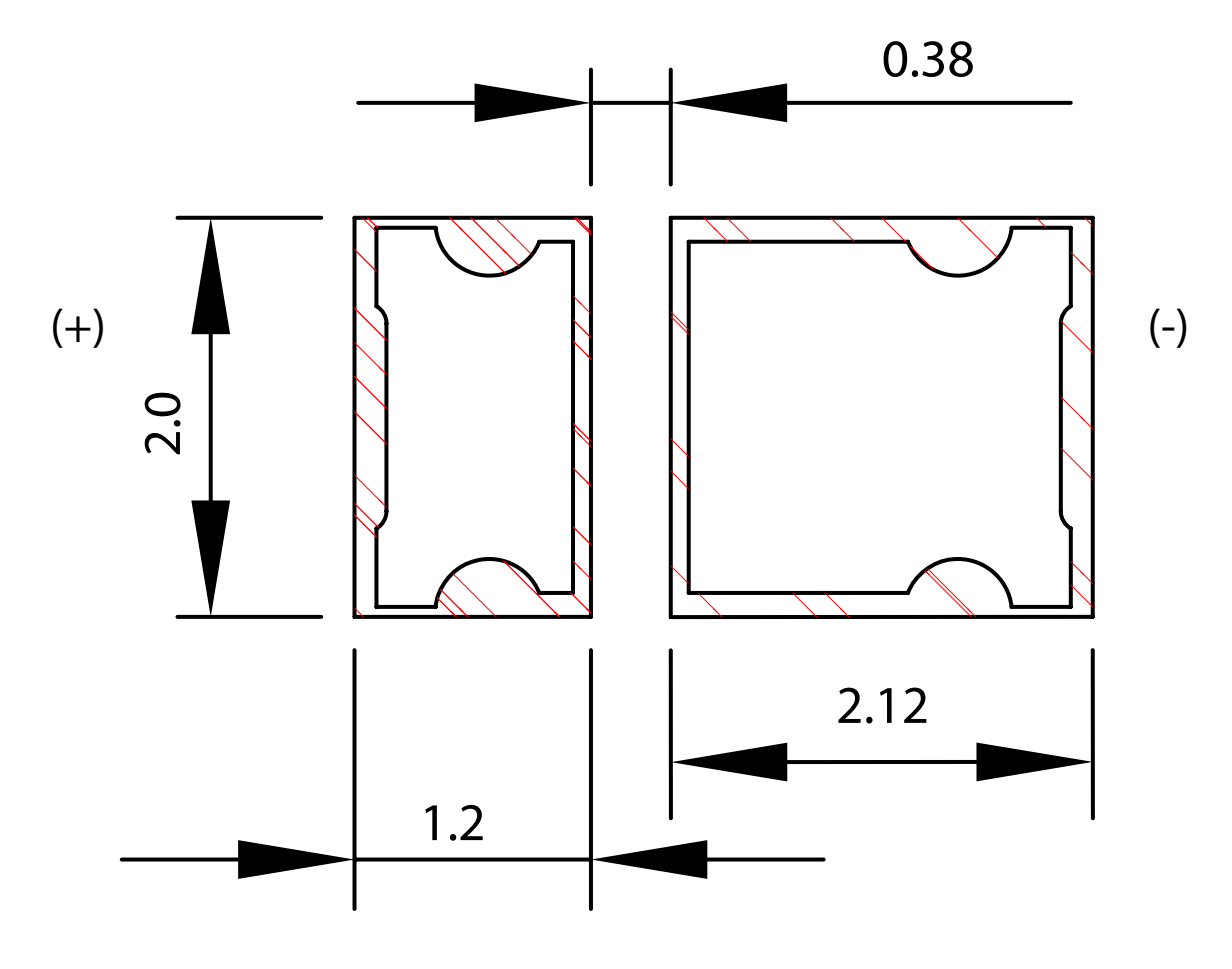

Notes:
1. All dimensions are measured in mm.
2. Tolerance : ± 0.20 mm




Color BIN code

Color region stay within Macadam "3-Step/5-step" ellipse from the chromaticity center.
The chromaticity center refers to ANSI C78.377:2008.
Please refer to ANSI C78.377 for the chromaticity center.

CCT	Steps	Cx	Cy	a	b	theta
2700K	5	0.4578	0.4101	0.01350	0.00700	53.70
3000K	5	0.4338	0.4030	0.01390	0.00680	53.22
3500K	5	0.4073	0.3917	0.01545	0.00690	54.00
4000K	5	0.3818	0.3797	0.01565	0.00670	53.72
5000K	5	0.3447	0.3553	0.01370	0.00590	59.62
5700K	5	0.3287	0.3417	0.01243	0.00533	59.09
6500K	5	0.3123	0.3282	0.01115	0.00475	58.57


CCT	Steps	Cx	Cy	a	b	theta
2700K	3	0.4578	0.4101	0.00810	0.00420	53.70
3000K	3	0.4338	0.4030	0.00834	0.00408	53.22
3500K	3	0.4073	0.3917	0.00927	0.00414	54.00
4000K	3	0.3818	0.3797	0.00939	0.00402	53.72
5000K	3	0.3447	0.3553	0.00822	0.00354	59.62
5700K	3	0.3287	0.3417	0.00746	0.00320	59.09
6500K	3	0.3123	0.3282	0.00669	0.00285	58.57

Cool White

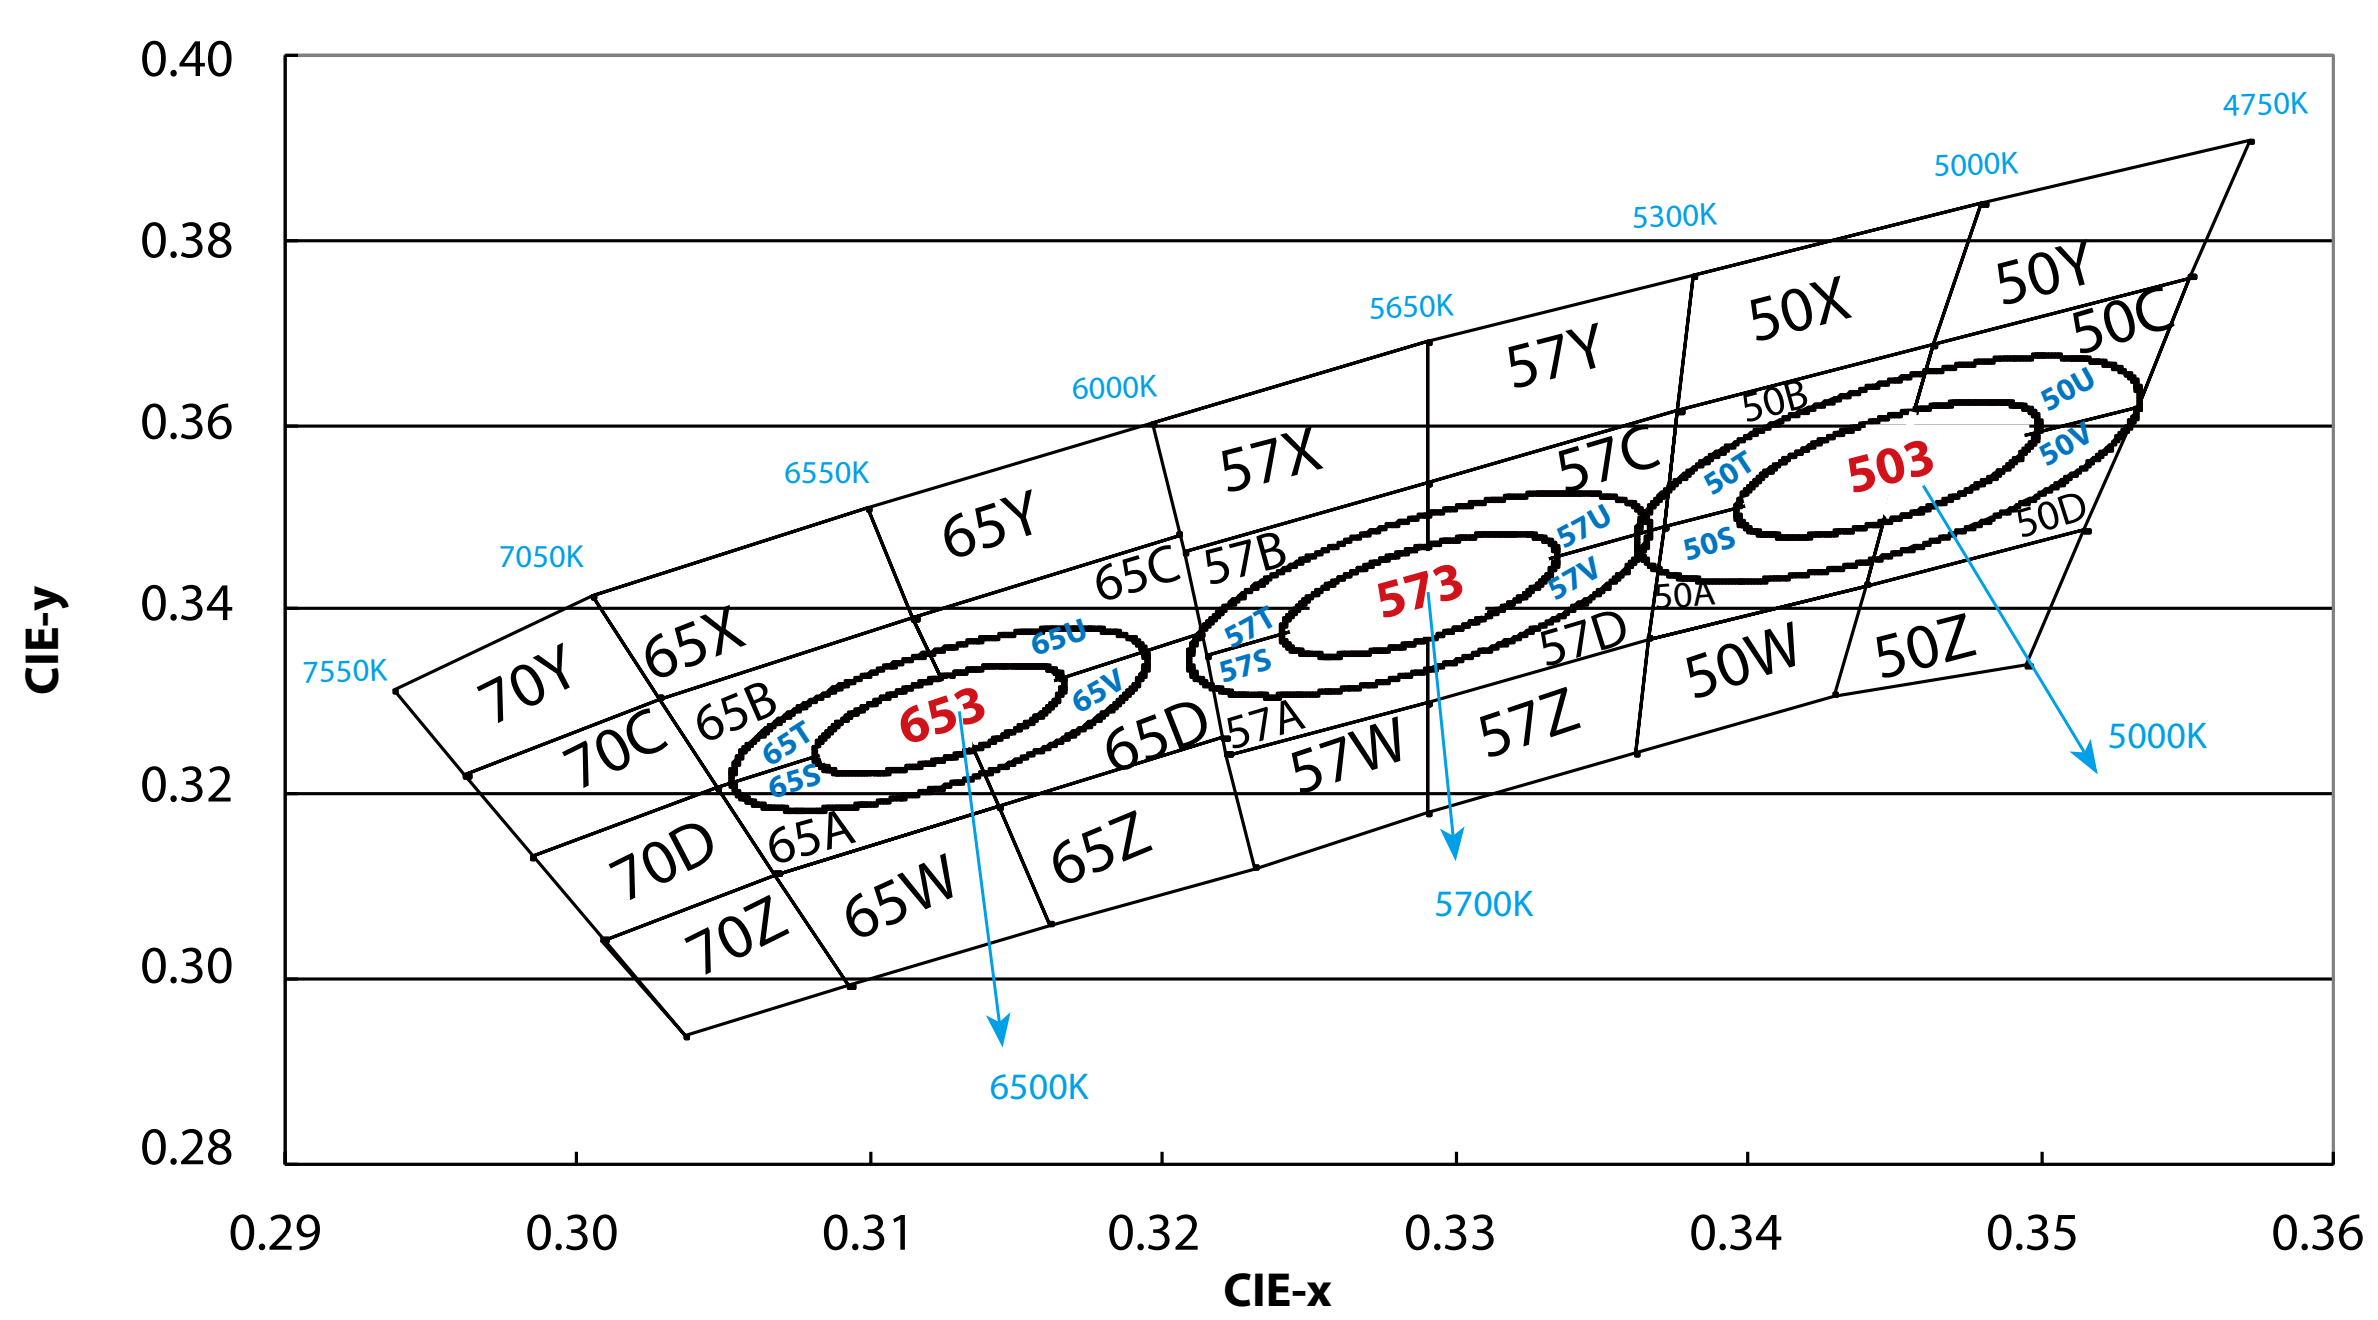




Neutral White

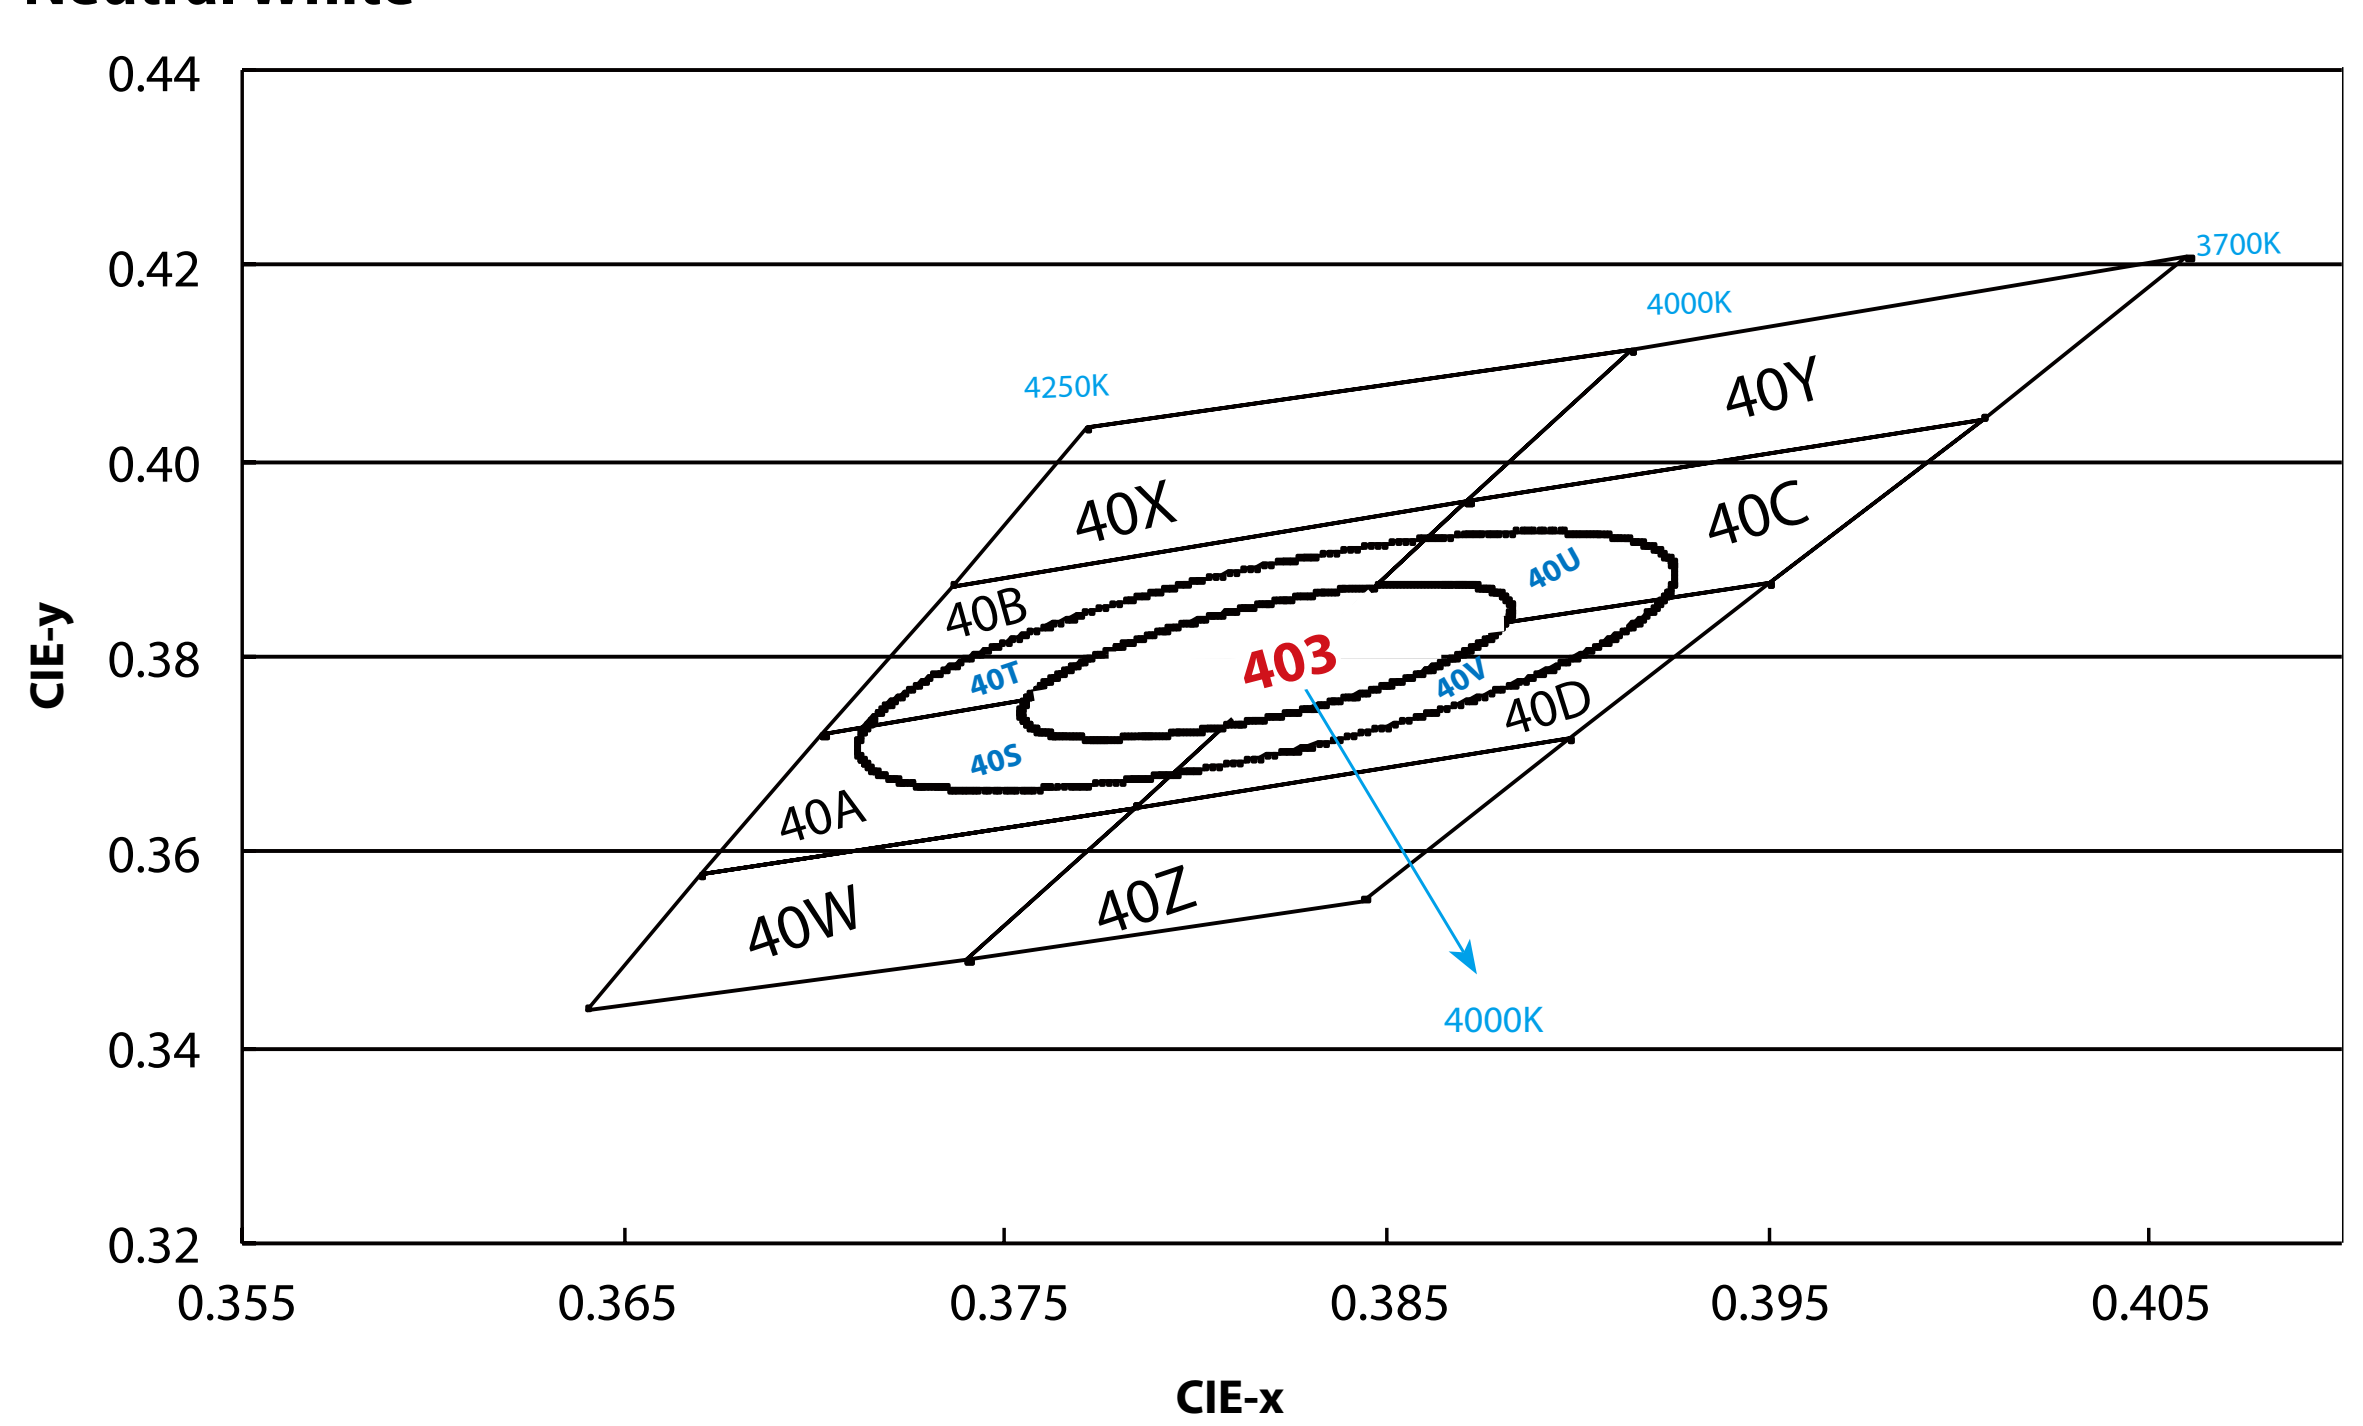

Warm White

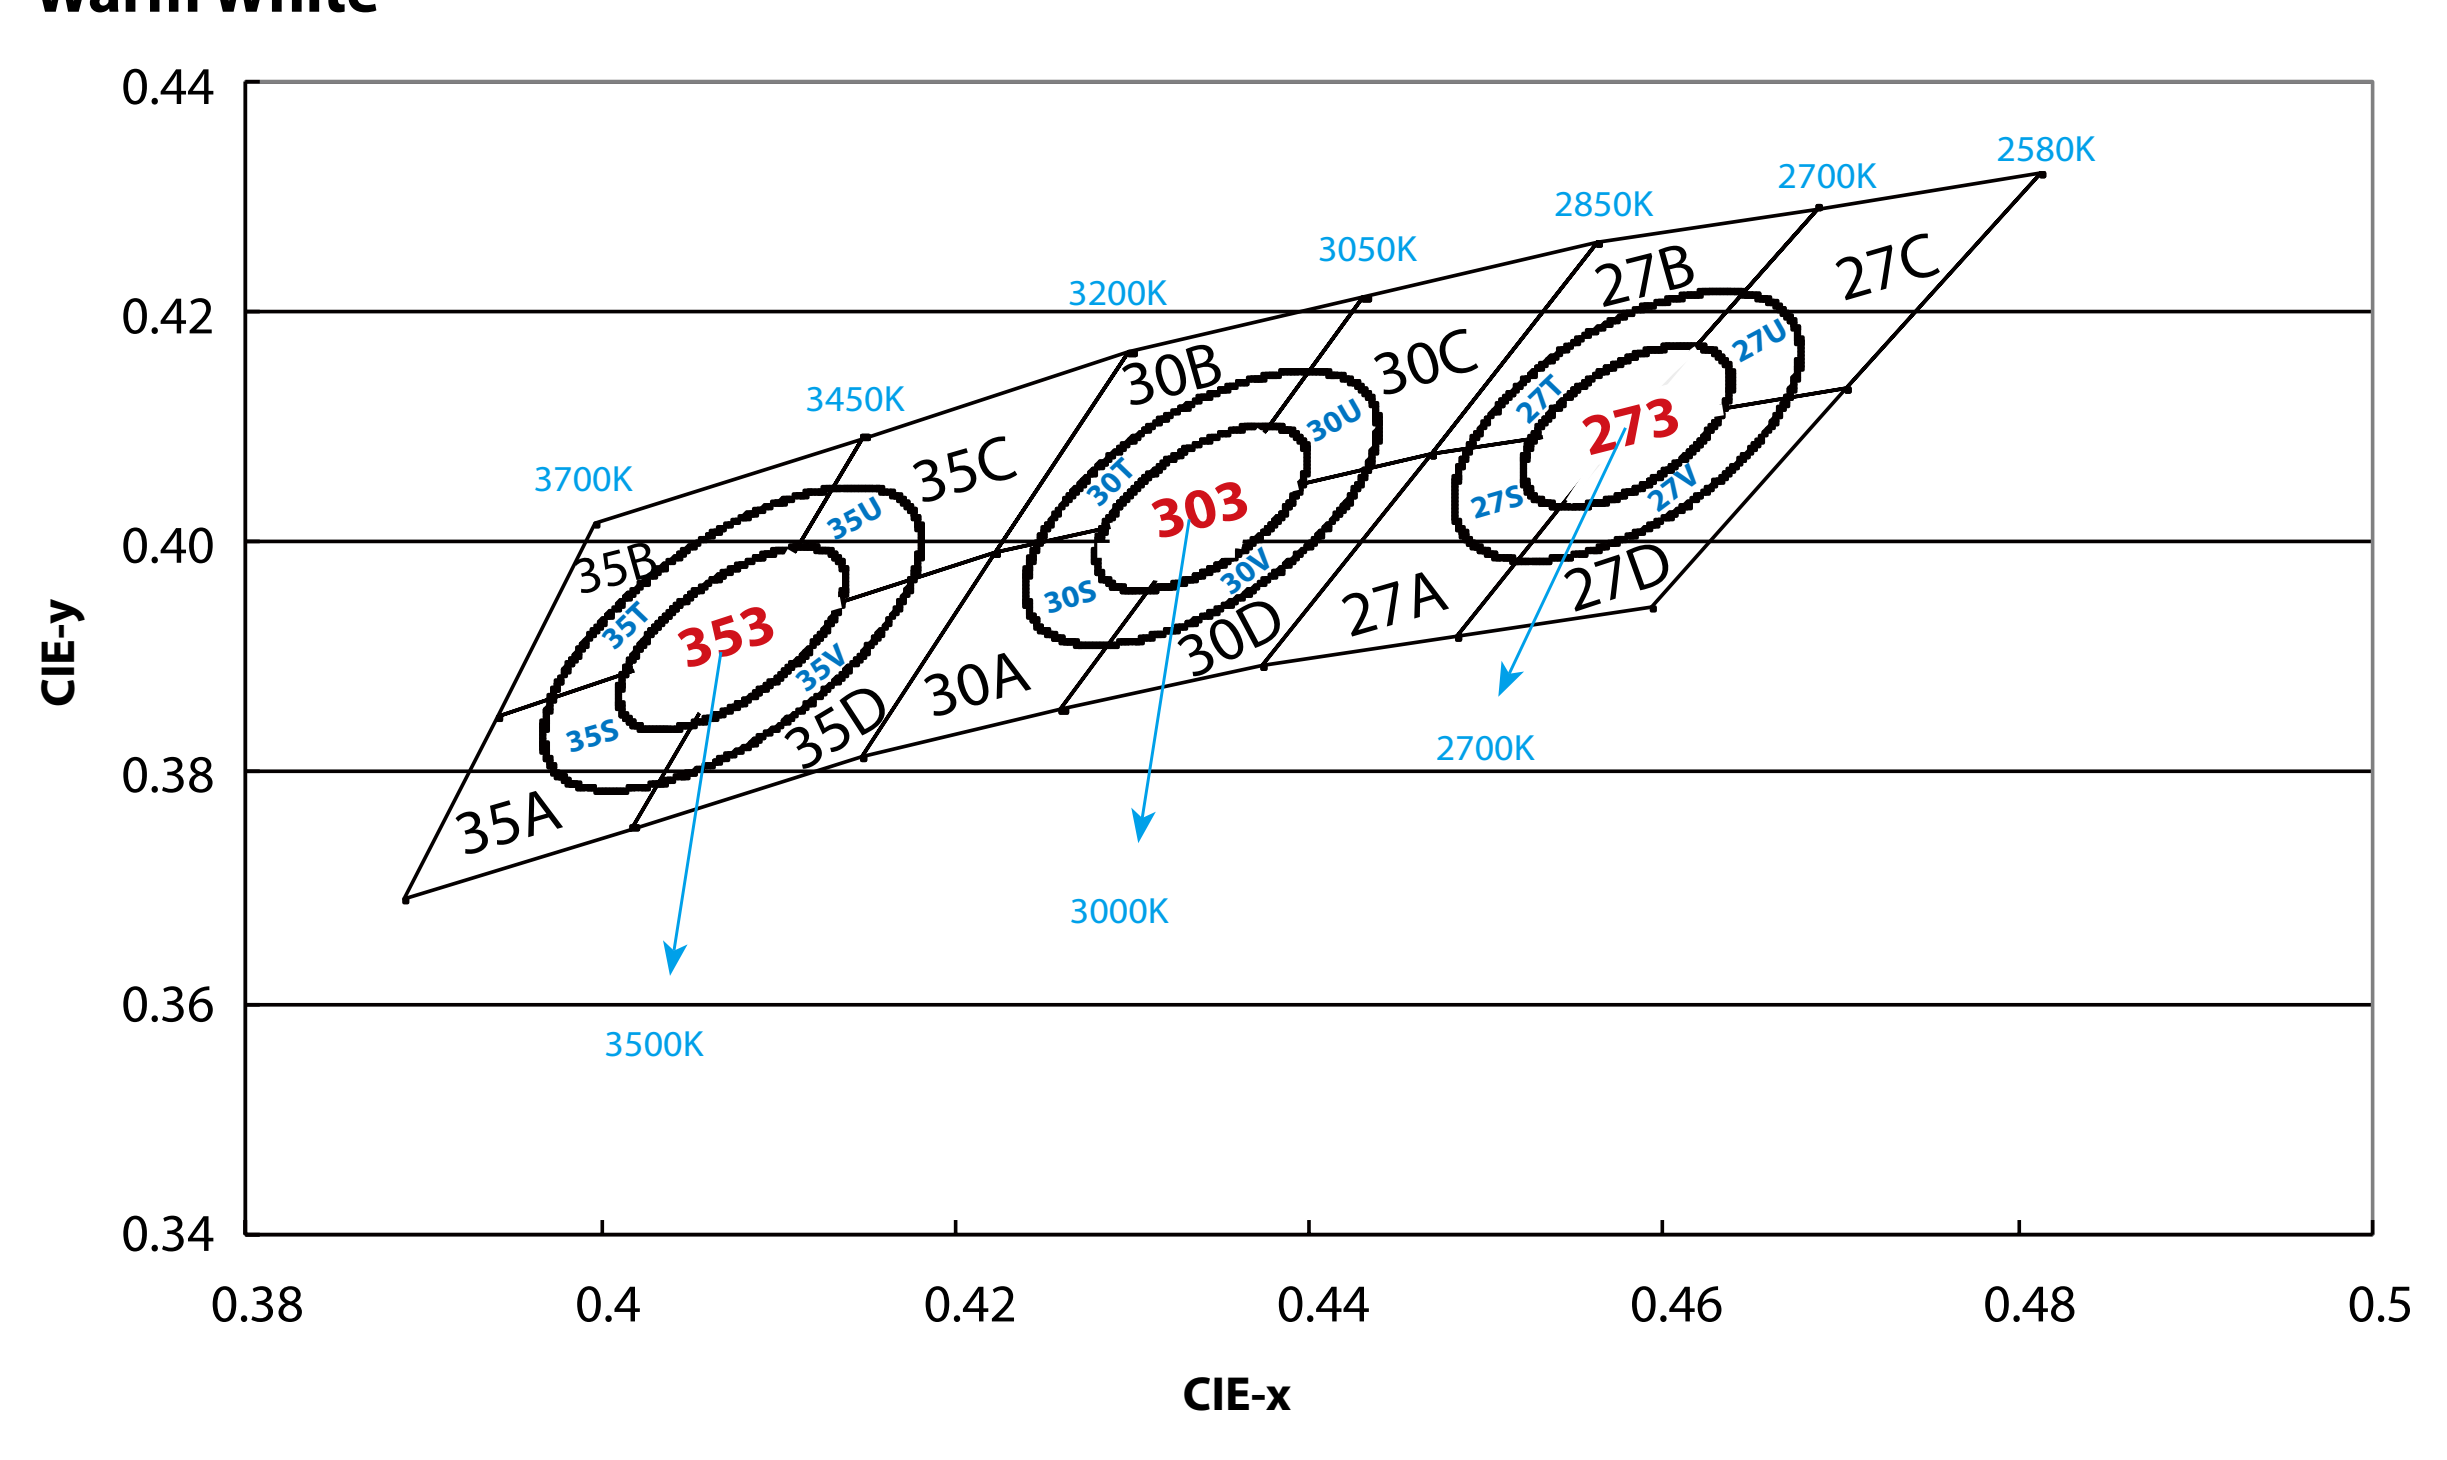



6500K

65X		65B		65A		65W	
X	Y	X	Y	X	Y	X	Y
0.3005	0.3415	0.3115	0.3391	0.3130	0.3290	0.3068	0.3113
0.3099	0.3509	0.3028	0.3304	0.3048	0.3207	0.3144	0.3186
0.3115	0.3391	0.3048	0.3207	0.3068	0.3113	0.3161	0.3059
0.3028	0.3304	0.3130	0.3290	0.3144	0.3186	0.3093	0.2993

65Y		65C		65D		65Z	
X	Y	X	Y	X	Y	X	Y
0.3099	0.3509	0.3205	0.3481	0.3213	0.3373	0.3144	0.3186
0.3196	0.3602	0.3115	0.3391	0.3130	0.3290	0.3221	0.3261
0.3205	0.3481	0.3130	0.3290	0.3144	0.3186	0.3231	0.3120
0.3115	0.3391	0.3213	0.3373	0.3221	0.3261	0.3161	0.3059

5700K

57X		57B		57A		57W	
X	Y	X	Y	X	Y	X	Y
0.3196	0.3602	0.3290	0.3538	0.3290	0.3417	0.3222	0.3243
0.3290	0.3690	0.3207	0.3462	0.3215	0.3350	0.3290	0.3300
0.3290	0.3538	0.3215	0.3350	0.3222	0.3243	0.3290	0.3180
0.3207	0.3462	0.3290	0.3417	0.3290	0.3300	0.3231	0.3120

57Y		57C		57D		57Z	
X	Y	X	Y	X	Y	X	Y
0.3290	0.3690	0.3376	0.3616	0.3371	0.3490	0.3290	0.3300
0.3381	0.3762	0.3290	0.3538	0.3290	0.3417	0.3366	0.3369
0.3376	0.3616	0.3290	0.3417	0.3290	0.3300	0.3361	0.3245
0.3290	0.3538	0.3371	0.3490	0.3366	0.3369	0.3290	0.3180

5000K

50X		50B		50A		50W	
X	Y	X	Y	X	Y	X	Y
0.3381	0.3762	0.3463	0.3687	0.3451	0.3554	0.3366	0.3369
0.3480	0.3840	0.3376	0.3616	0.3371	0.3490	0.3440	0.3427
0.3463	0.3687	0.3371	0.3490	0.3366	0.3369	0.3429	0.3307
0.3376	0.3616	0.3451	0.3554	0.3440	0.3427	0.3361	0.3245

50Y		50C		50D		50Z	
X	Y	X	Y	X	Y	X	Y
0.3480	0.3840	0.3551	0.3760	0.3533	0.3620	0.3440	0.3427
0.3571	0.3907	0.3463	0.3687	0.3451	0.3554	0.3515	0.3487
0.3551	0.3760	0.3451	0.3554	0.3440	0.3427	0.3495	0.3339
0.3463	0.3687	0.3533	0.3620	0.3515	0.3487	0.3429	0.3307



4000K

40X		40B		40A		40W	
X	Y	X	Y	X	Y	X	Y
0.3771	0.4034	0.3871	0.3959	0.3828	0.3803	0.3670	0.3578
0.3736	0.3874	0.3736	0.3874	0.3702	0.3722	0.3640	0.3440
0.3871	0.3959	0.3702	0.3722	0.3670	0.3578	0.3740	0.3491
0.3914	0.4115	0.3828	0.3803	0.3784	0.3647	0.3784	0.3647

40Y		40C		40D		40Z	
X	Y	X	Y	X	Y	X	Y
0.3914	0.4115	0.4006	0.4044	0.3950	0.3875	0.3784	0.3647
0.3871	0.3959	0.3871	0.3959	0.3828	0.3803	0.3740	0.3491
0.4006	0.4044	0.3828	0.3803	0.3784	0.3647	0.3844	0.3552
0.4060	0.4208	0.3950	0.3875	0.3898	0.3716	0.3898	0.3716

3500K

35A		35B		35C		35D	
X	Y	X	Y	X	Y	X	Y
0.4083	0.3921	0.4148	0.4090	0.4299	0.4165	0.4223	0.399
0.3941	0.3848	0.3996	0.4015	0.4148	0.4090	0.4083	0.3921
0.3889	0.3690	0.3941	0.3848	0.4083	0.3921	0.4018	0.3752
0.4018	0.3752	0.4083	0.3921	0.4223	0.399	0.4147	0.3814

3000K

30A		30B		30C		30D	
X	Y	X	Y	X	Y	X	Y
0.4345	0.4033	0.4431	0.4213	0.4562	0.4260	0.4468	0.4077
0.4223	0.3990	0.4299	0.4165	0.4431	0.4213	0.4345	0.4033
0.4147	0.3814	0.4223	0.3990	0.4345	0.4033	0.4260	0.3854
0.4260	0.3854	0.4345	0.4033	0.4468	0.4077	0.4373	0.3893


2700K

27A		27B		27C		27D	
X	Y	X	Y	X	Y	X	Y
0.4578	0.4101	0.4687	0.4289	0.4813	0.4319	0.4703	0.4132
0.4468	0.4077	0.4562	0.4260	0.4687	0.4289	0.4578	0.4101
0.4373	0.3893	0.4468	0.4077	0.4578	0.4101	0.4483	0.3919
0.4483	0.3919	0.4578	0.4101	0.4703	0.4132	0.4593	0.3944




Characteristic curve

Color Spectrum (CRI80)

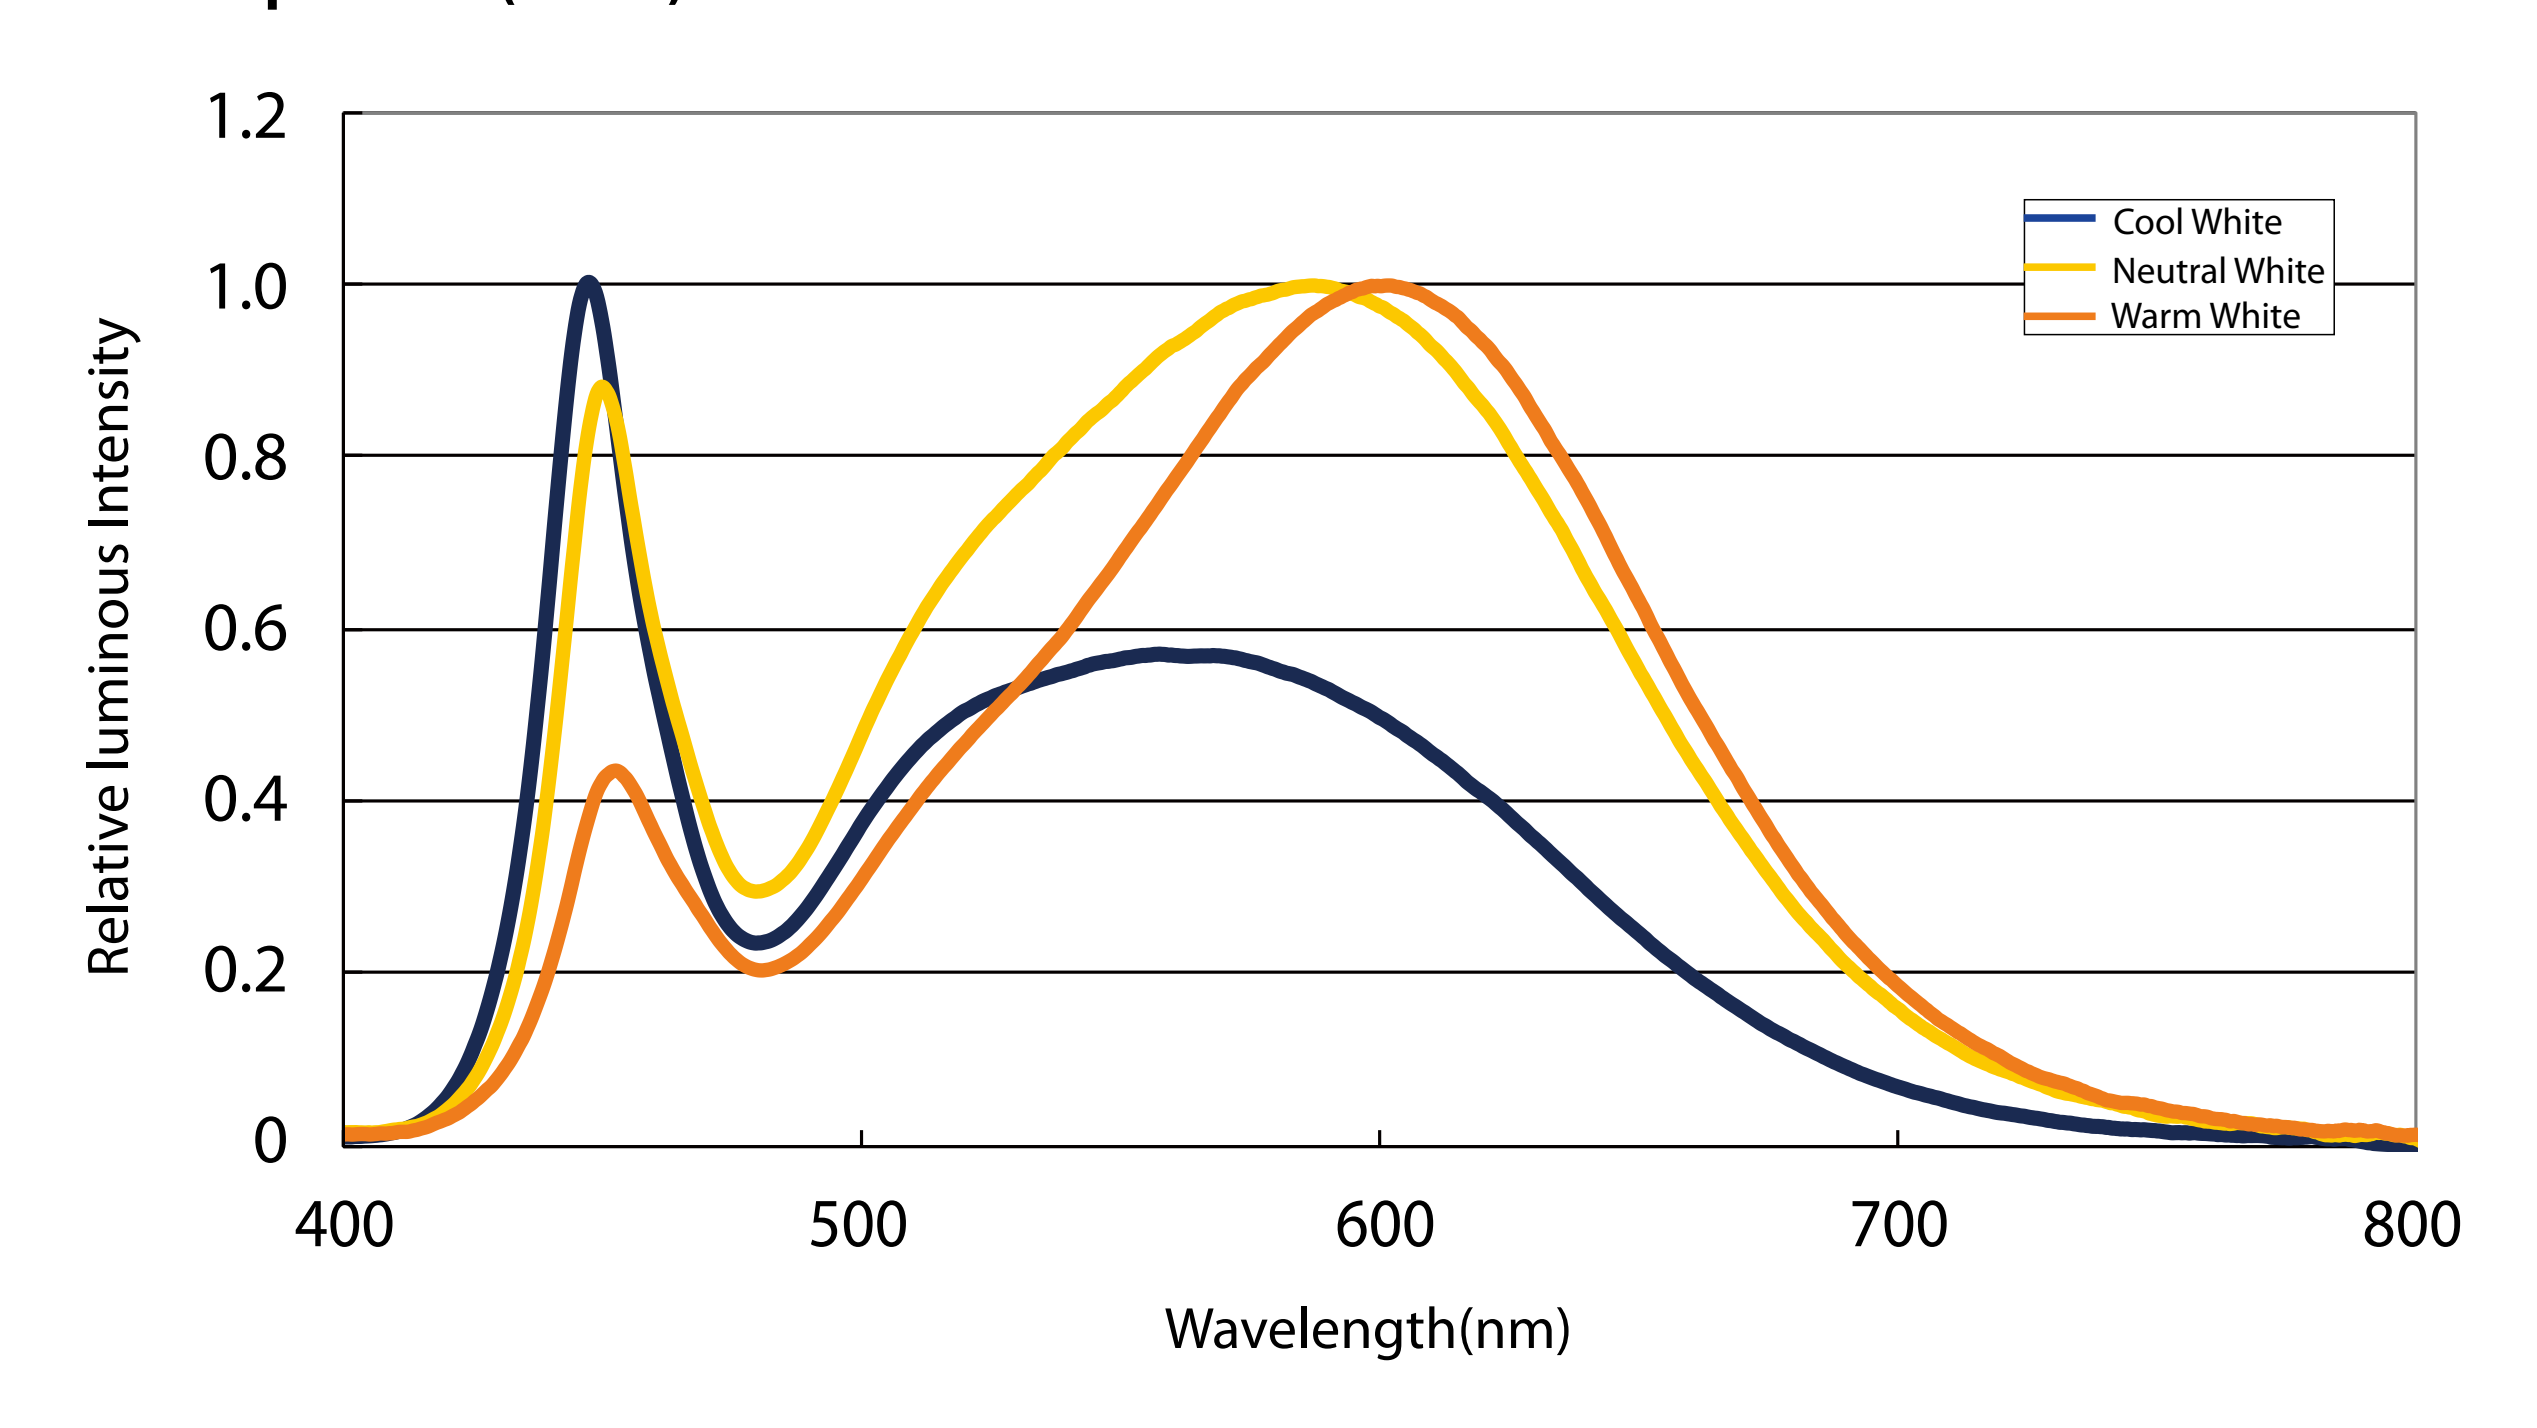


Color Spectrum (CRI90)

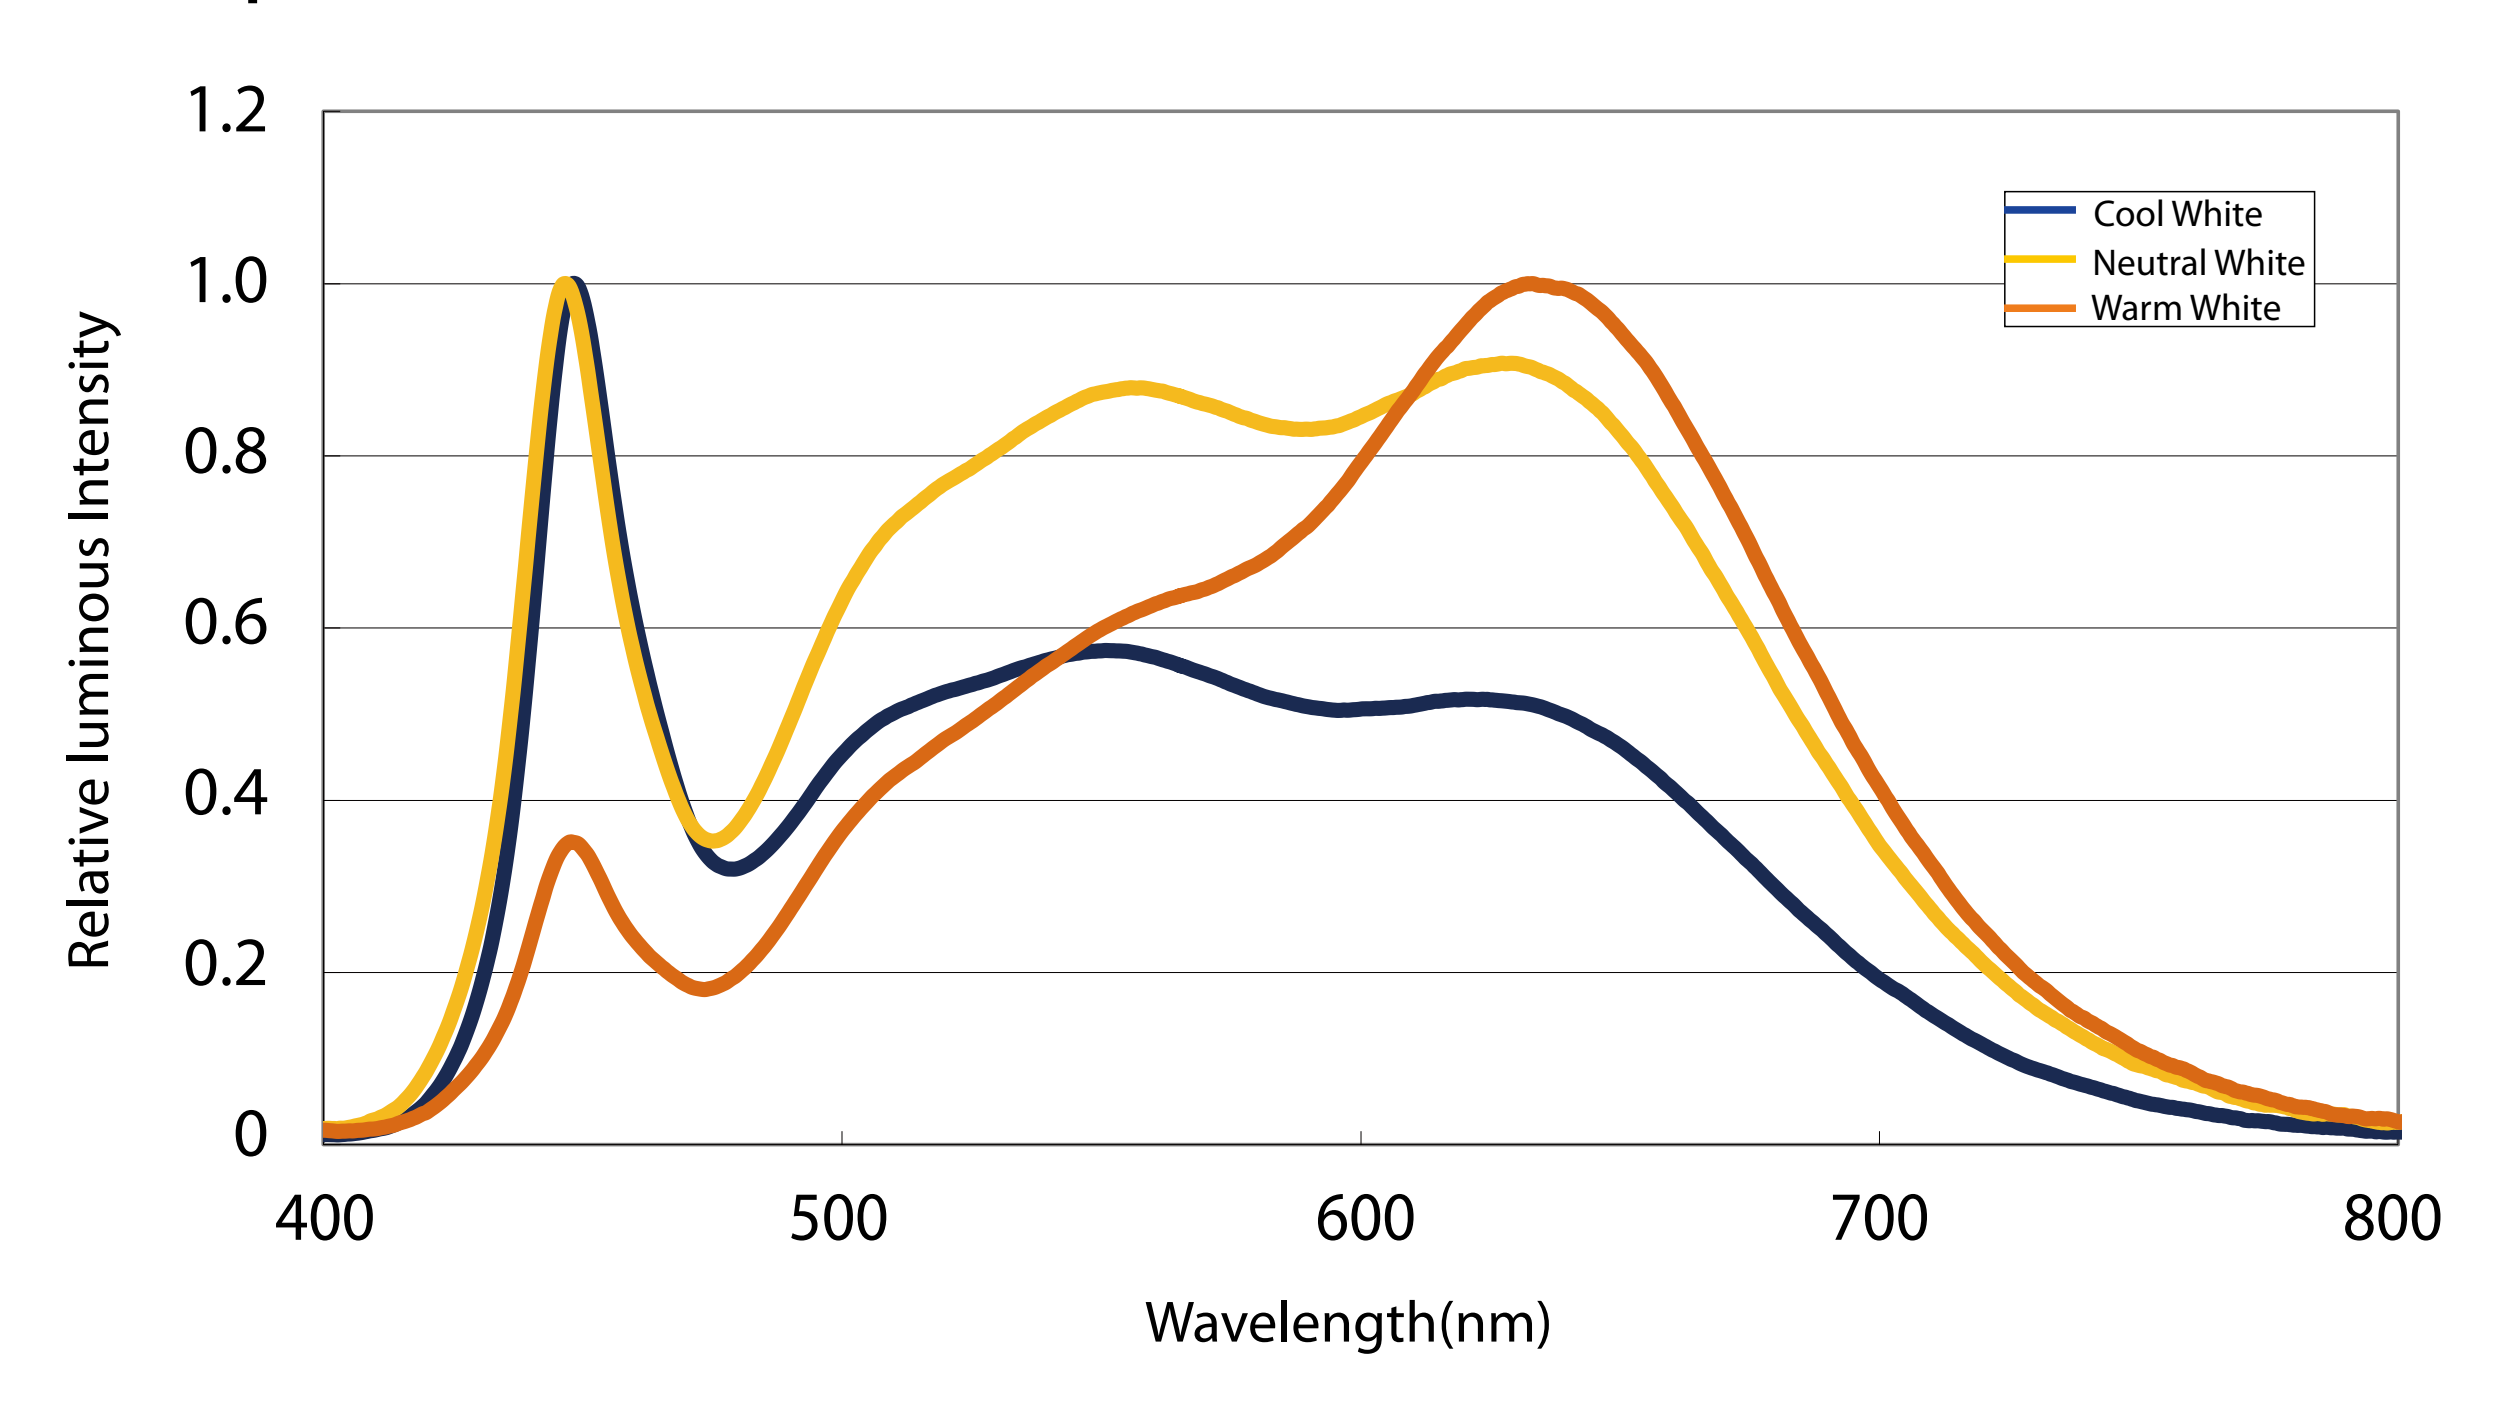




Beam Pattern

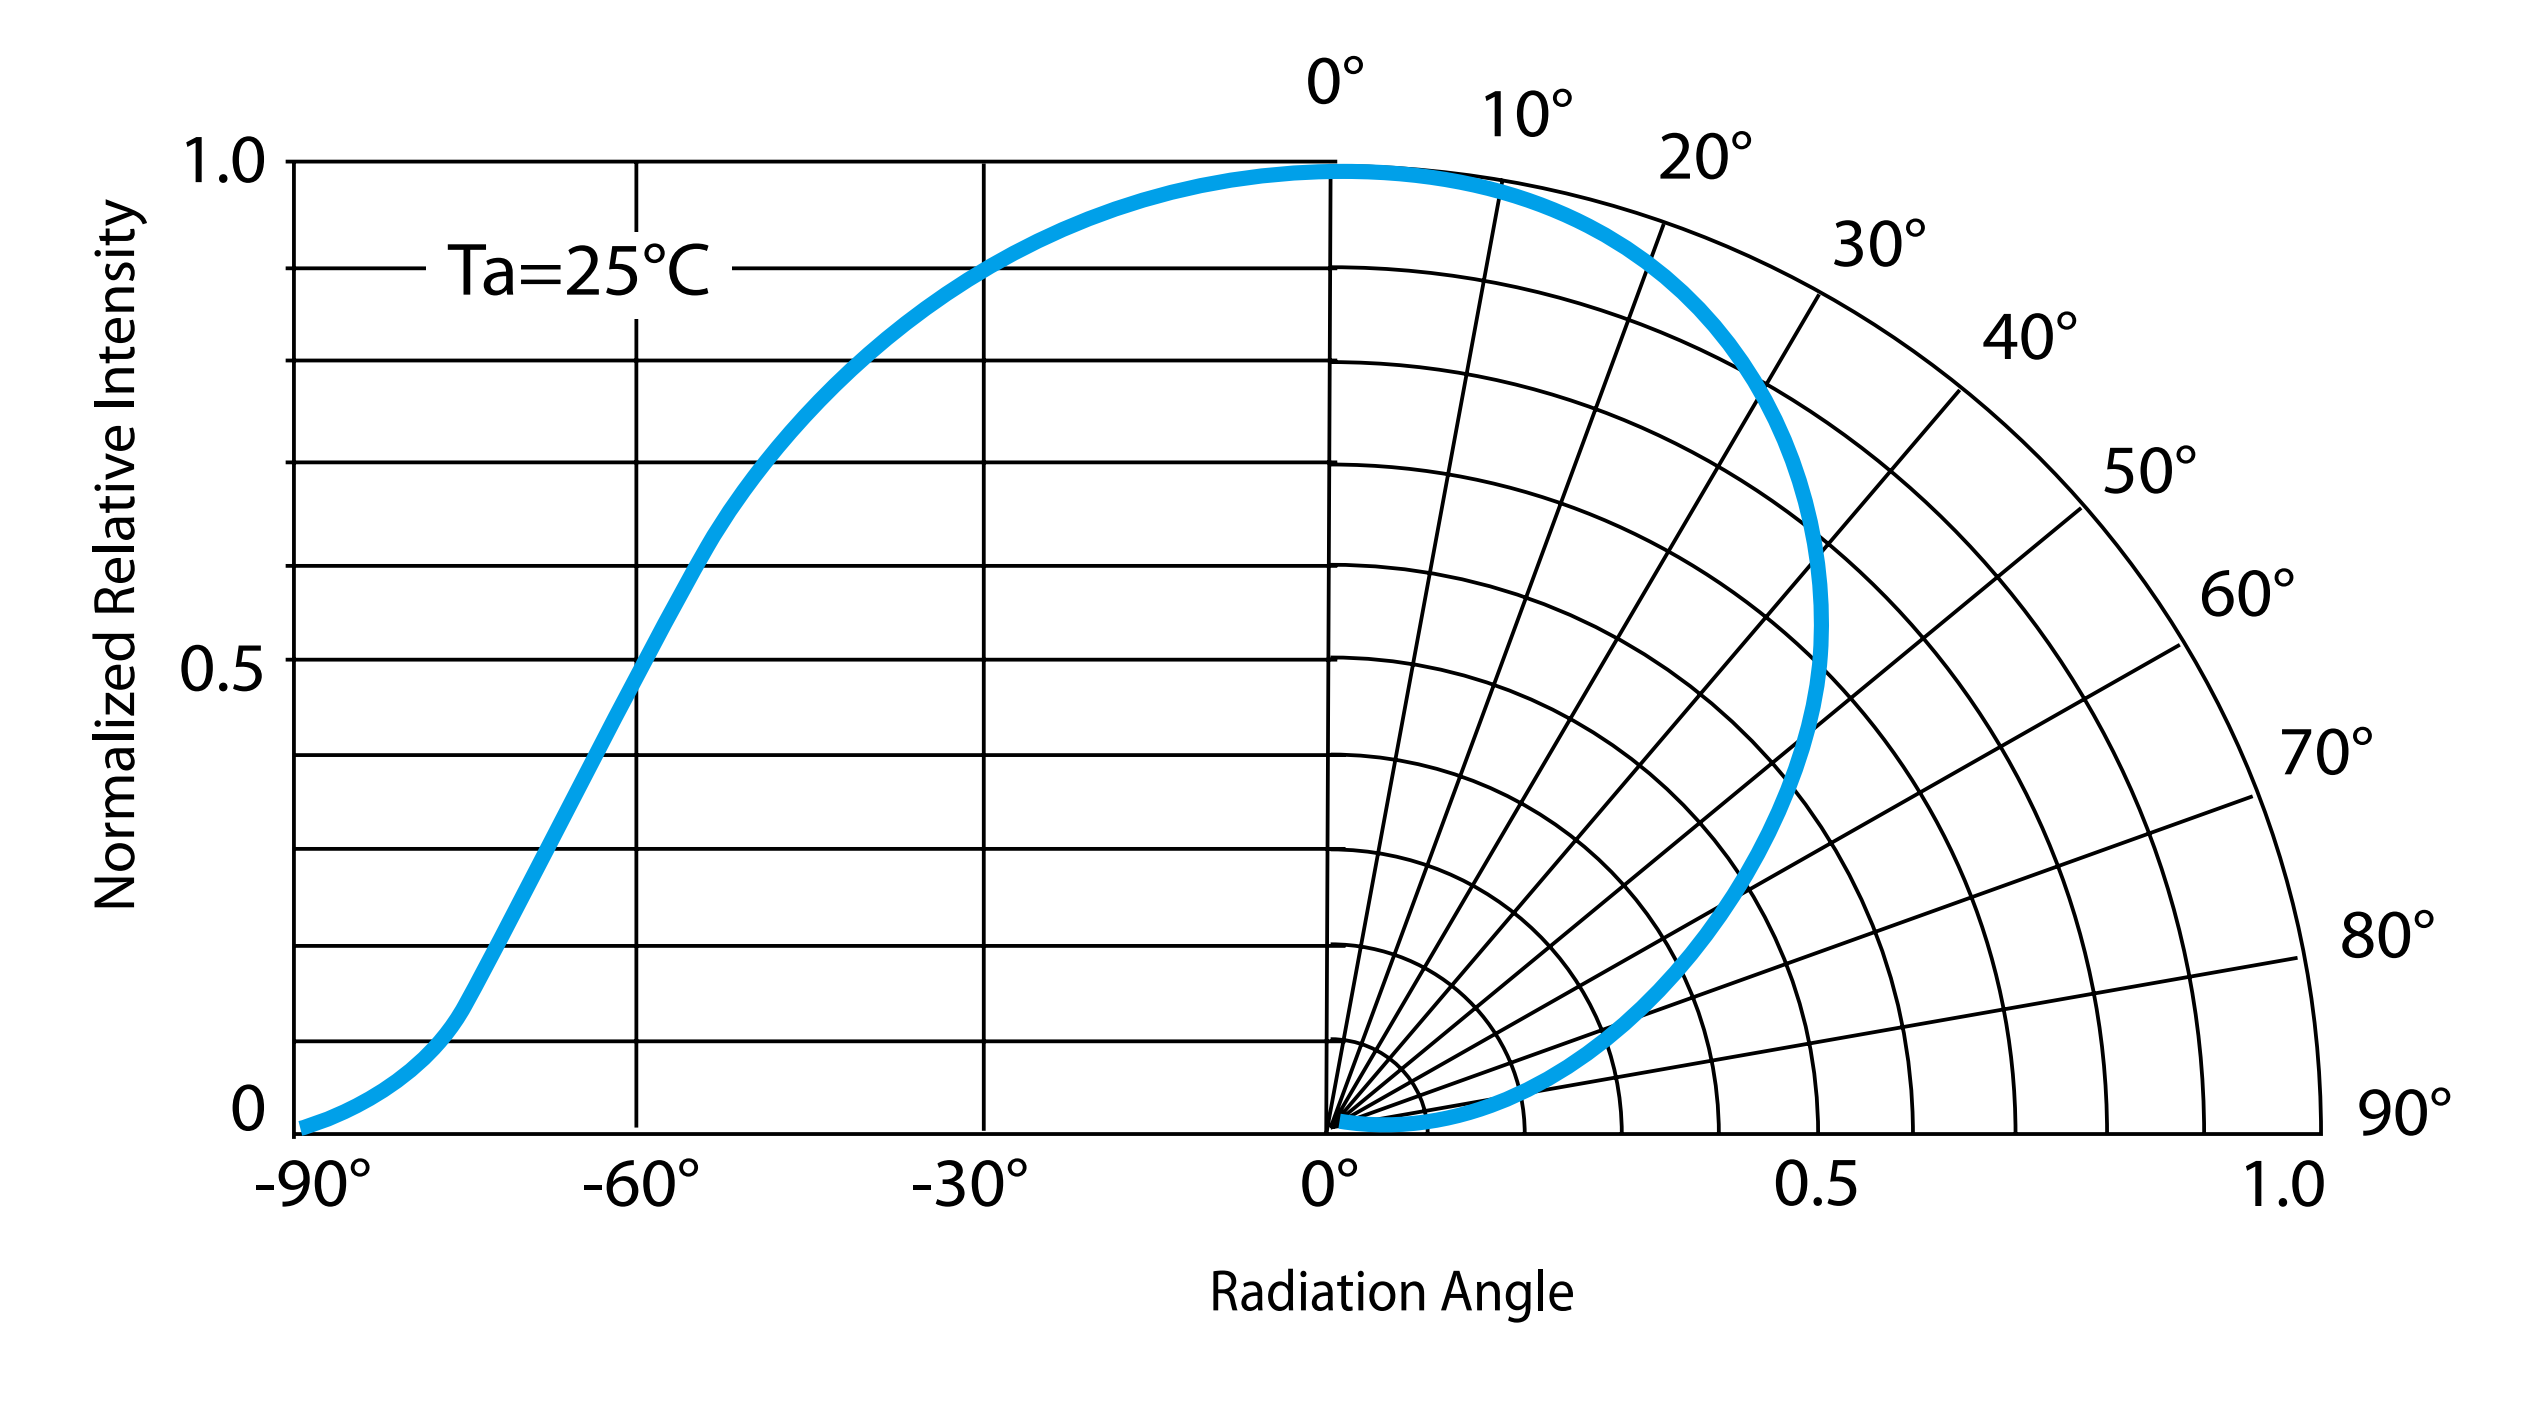




Forward Current vs. Forward Voltage

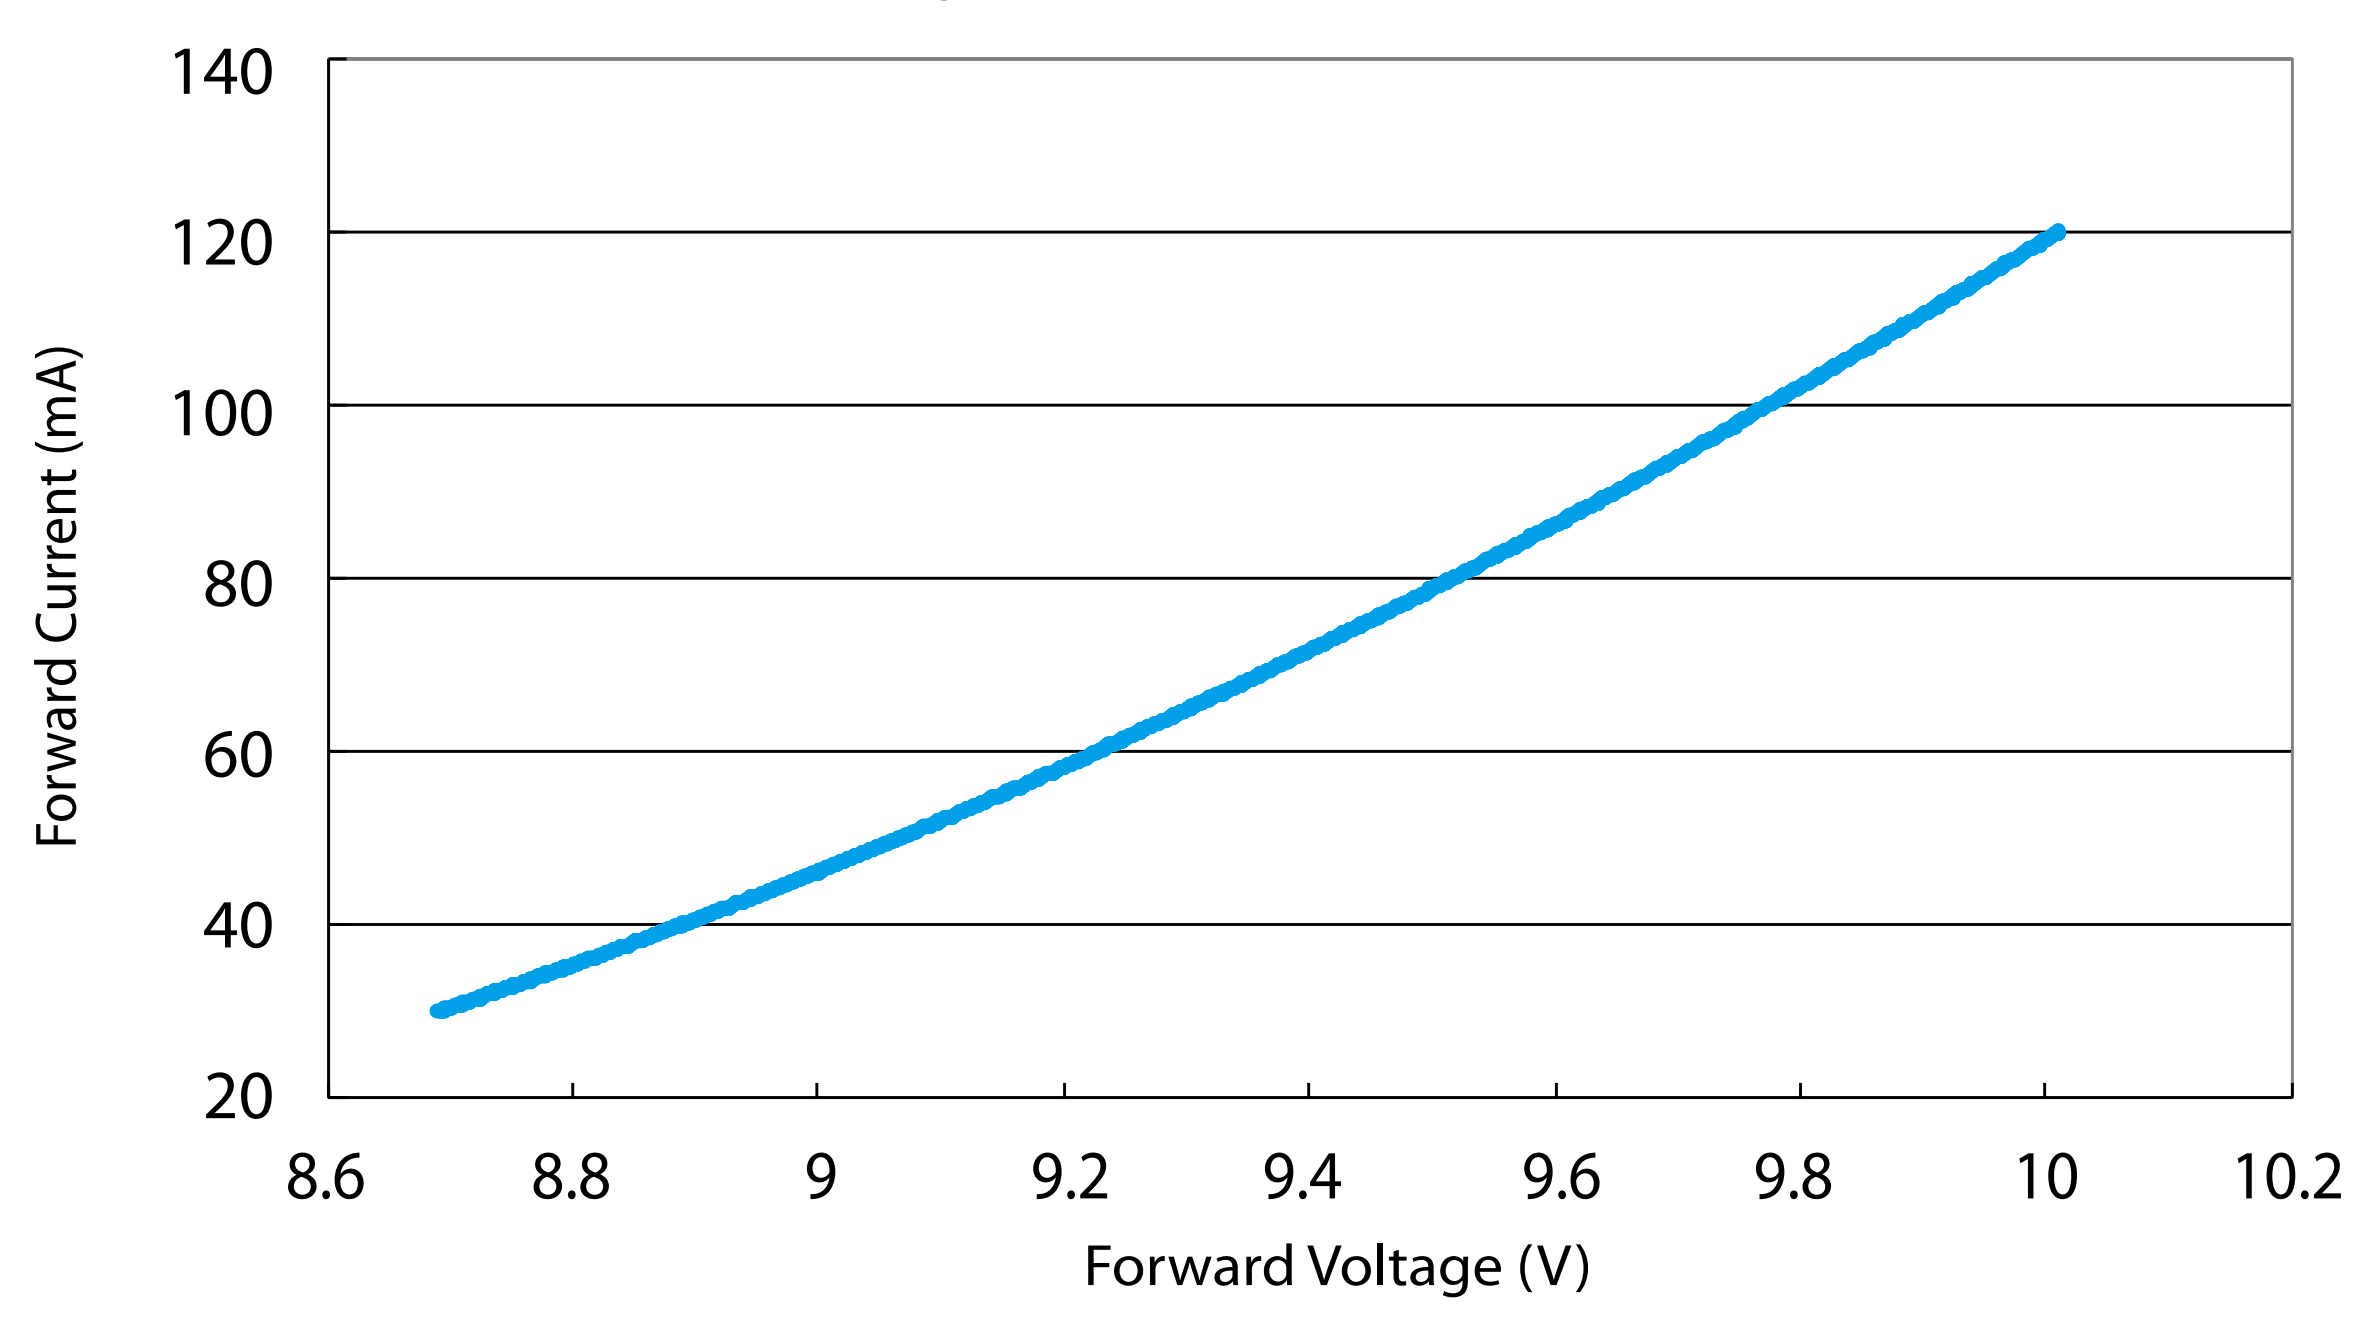


Relative Luminous Intensity vs. Forward Current

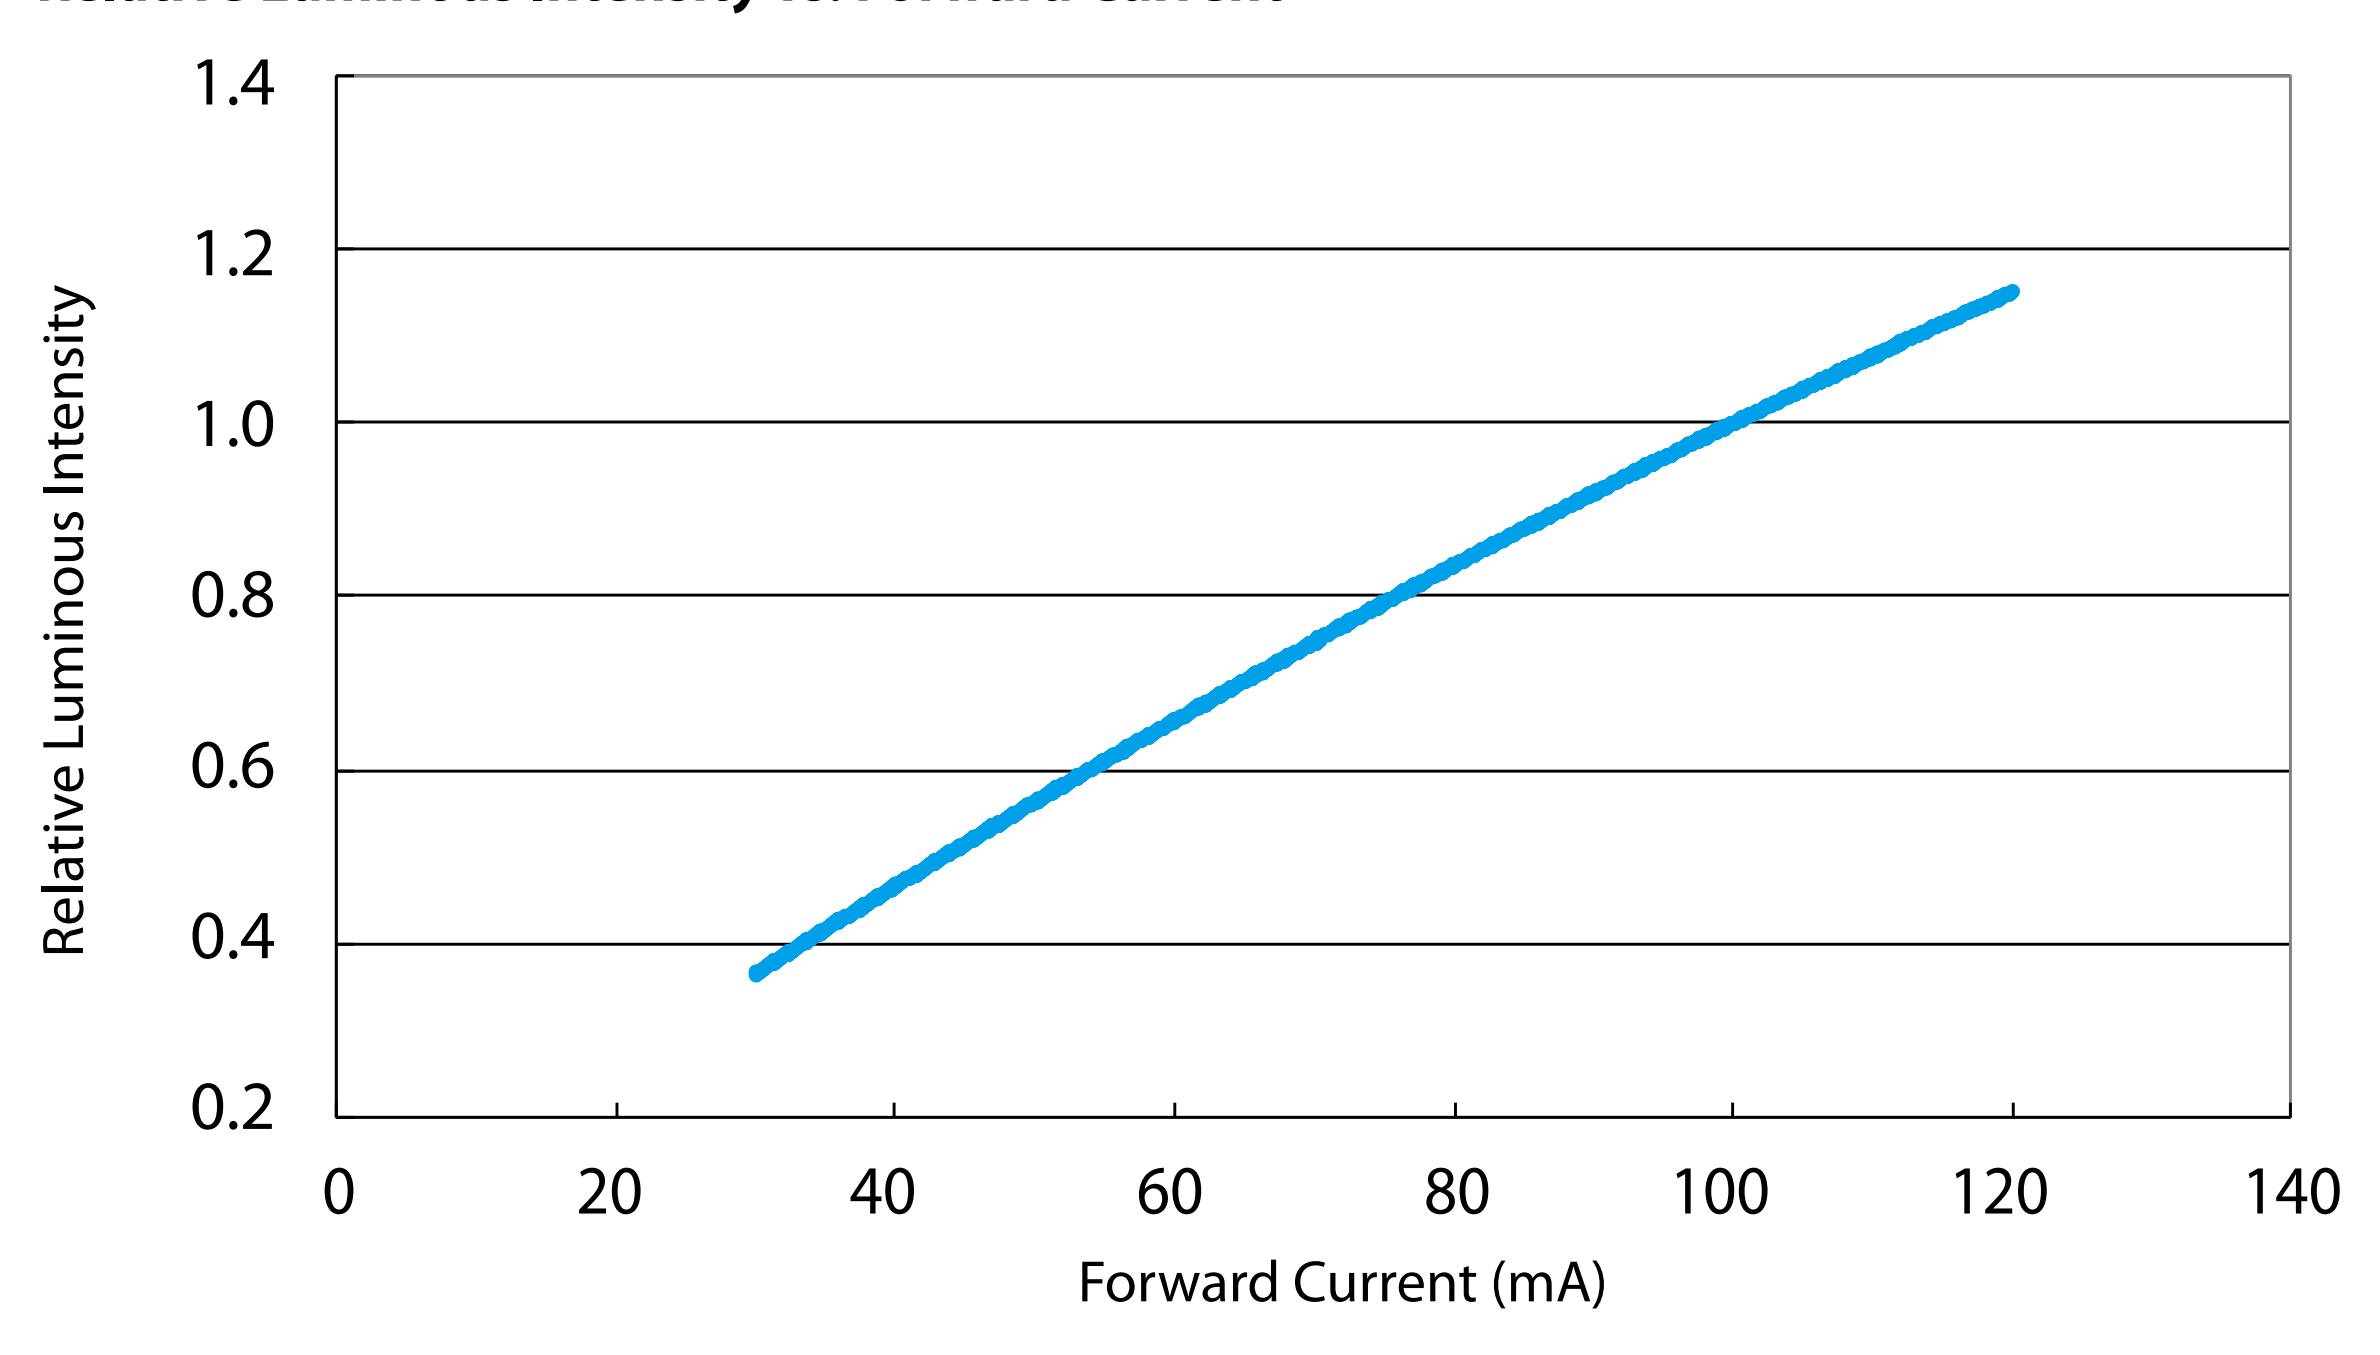




Relative Luminous Intensity vs. Junction Temperature

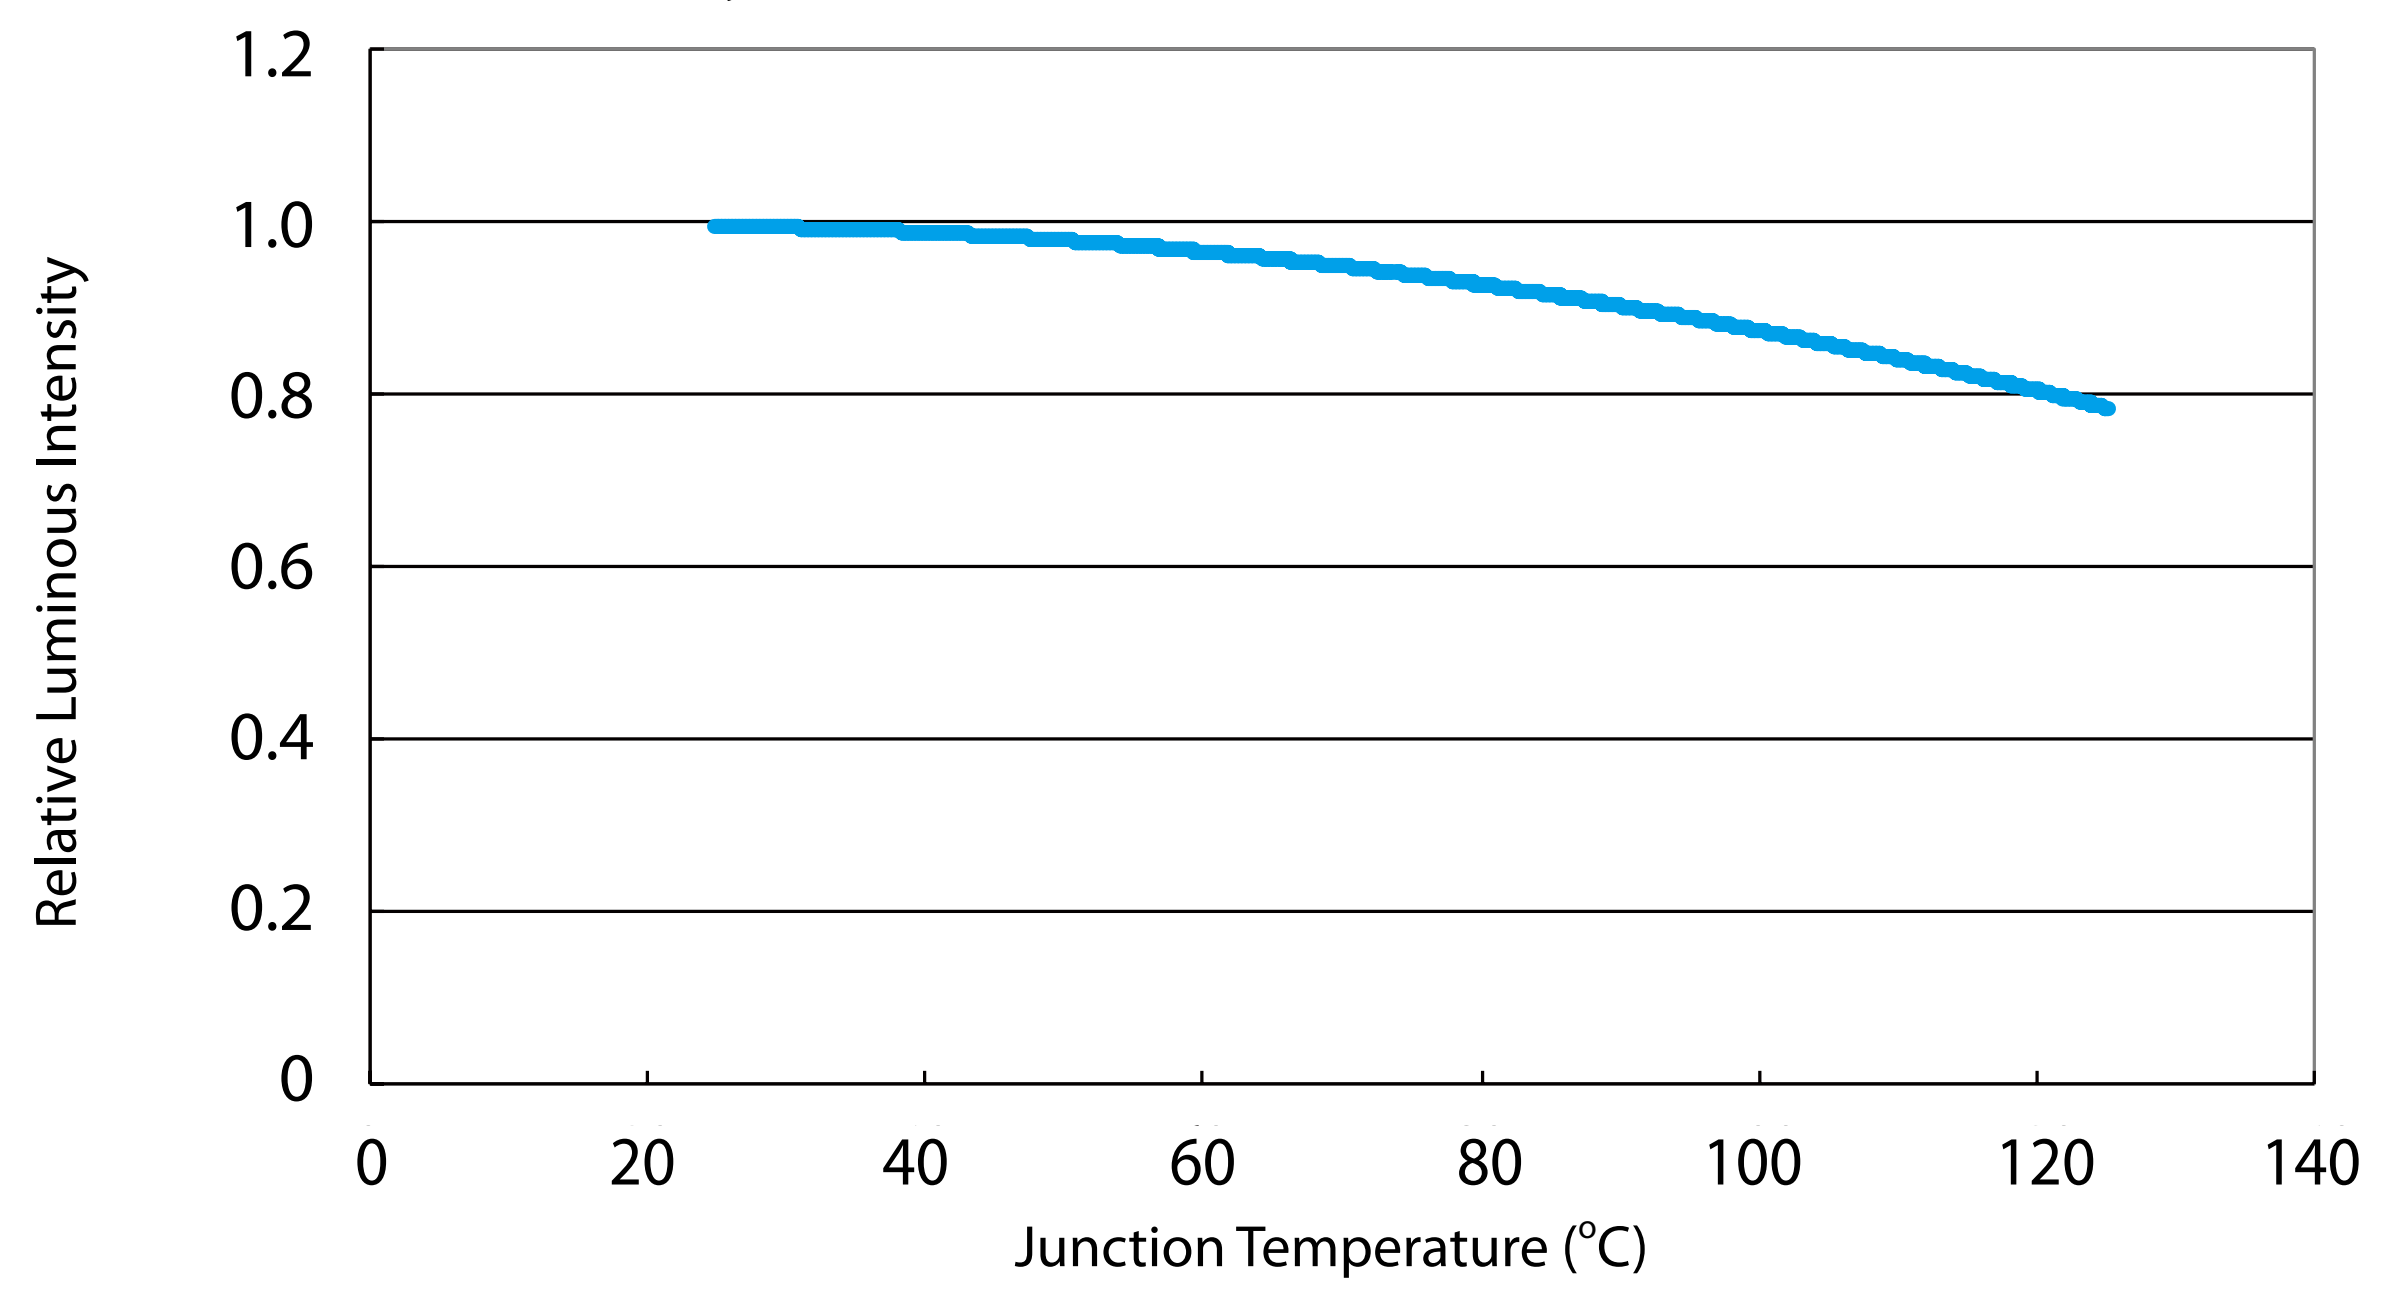


Forward Voltage vs. Junction Temperature

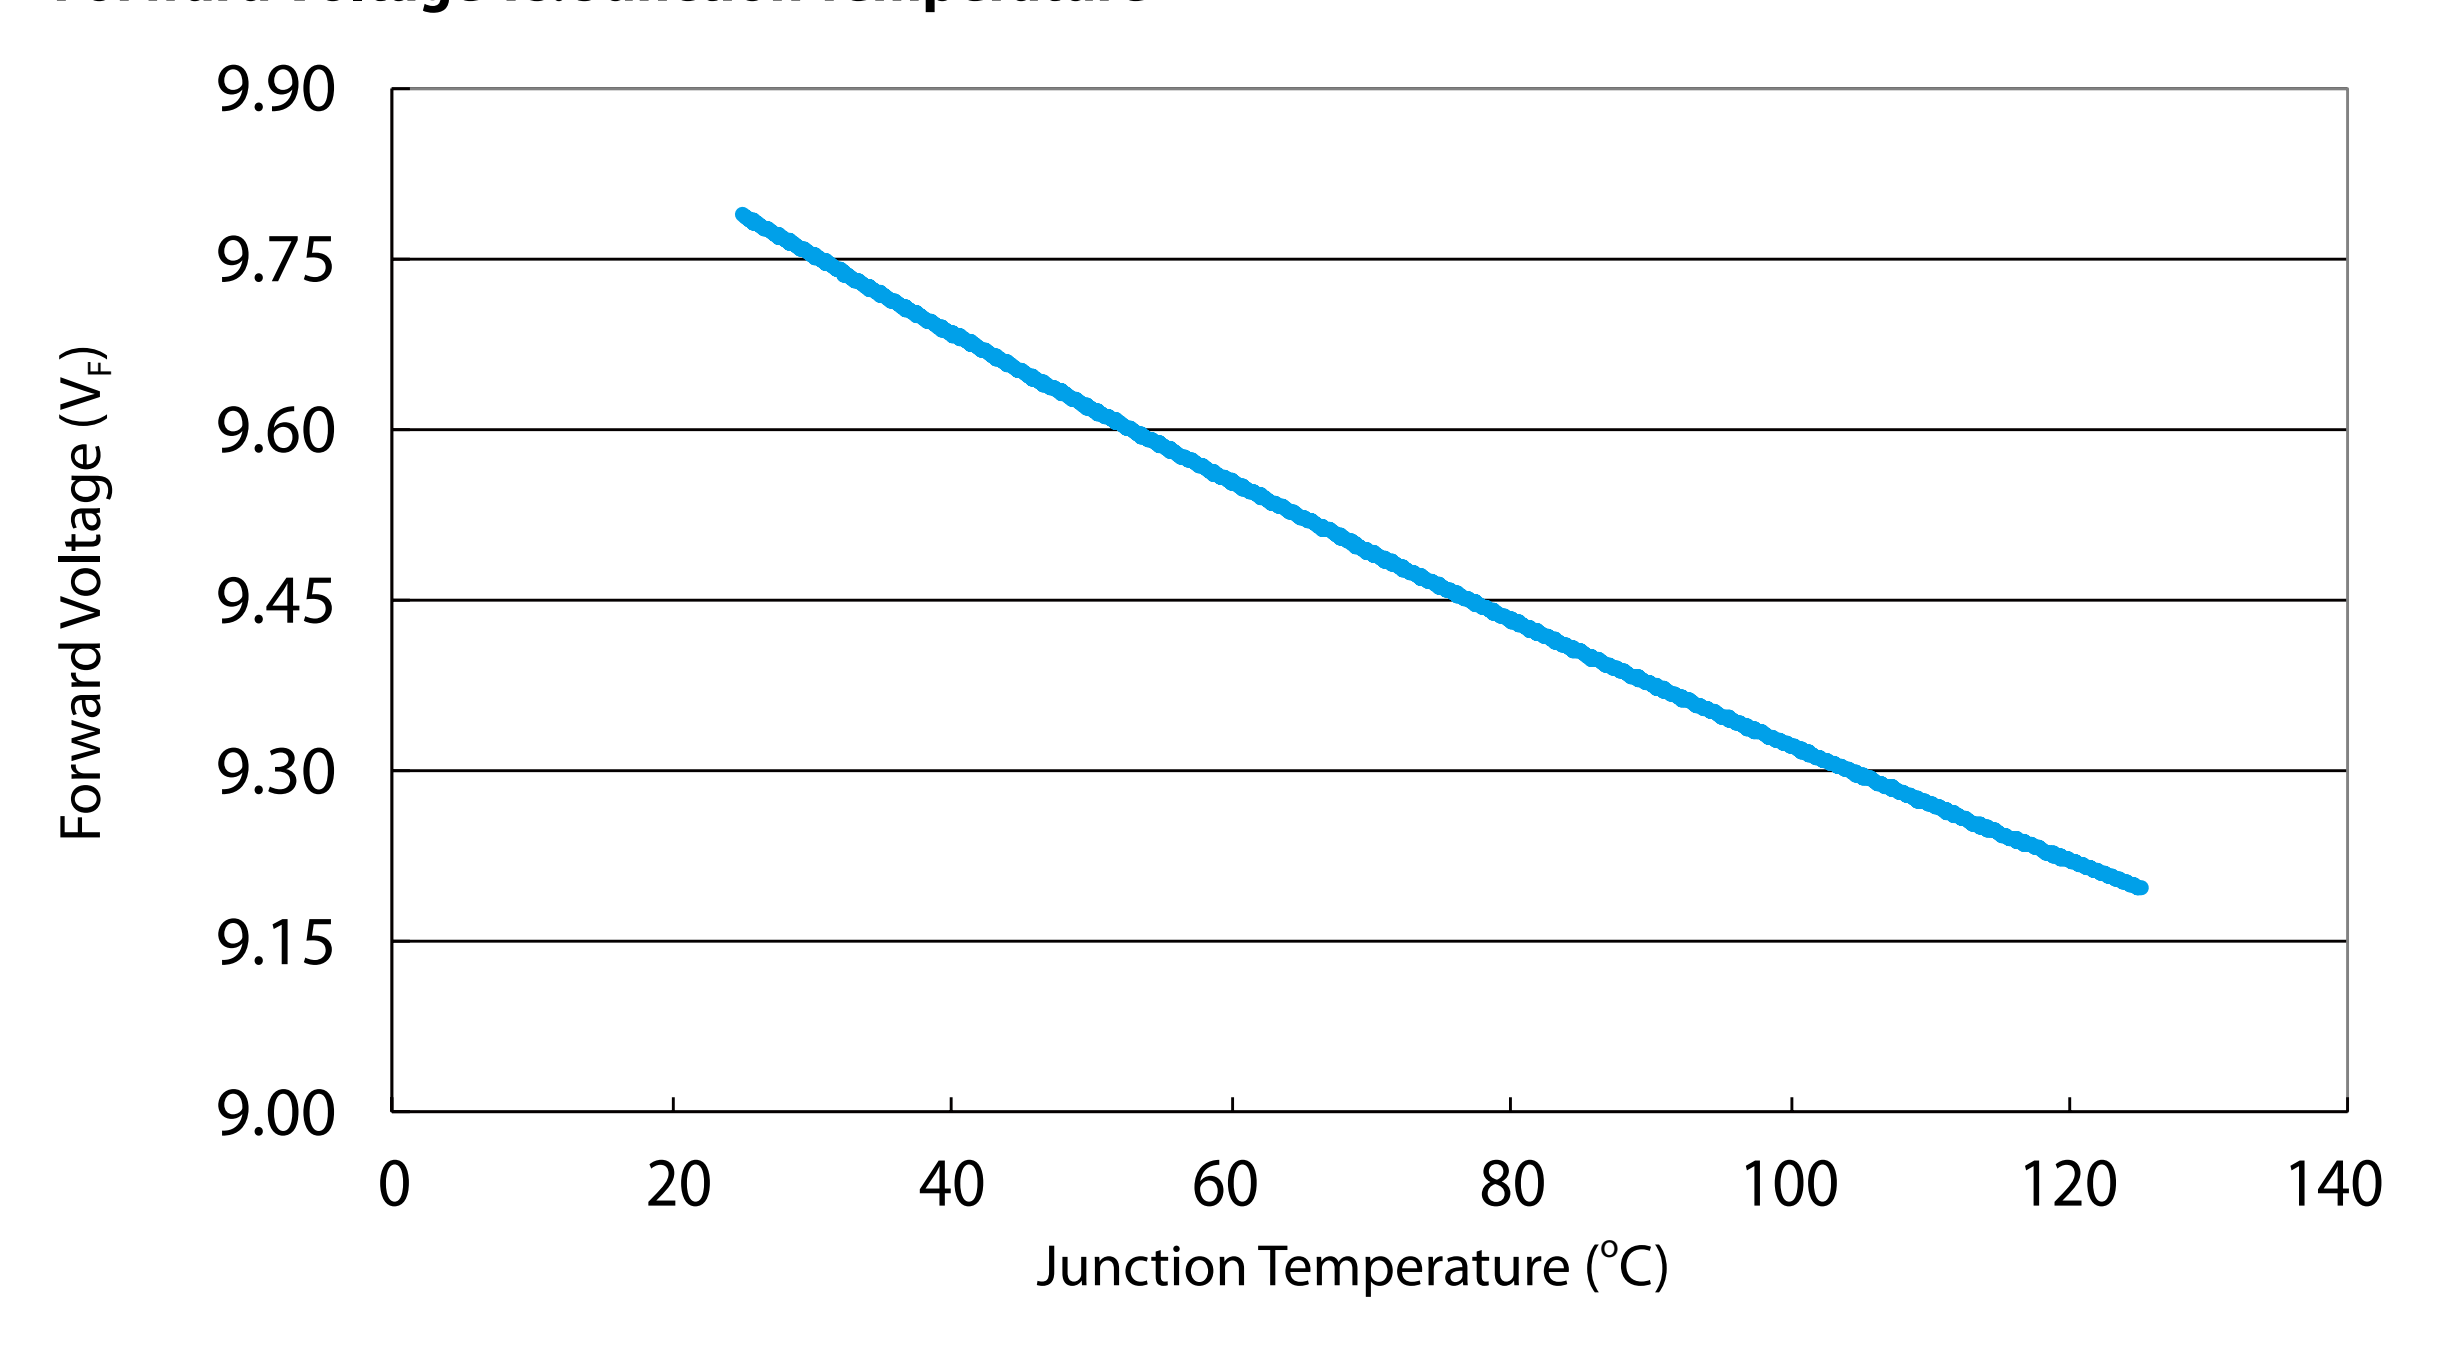




Δx,Δy vs. Forward Current

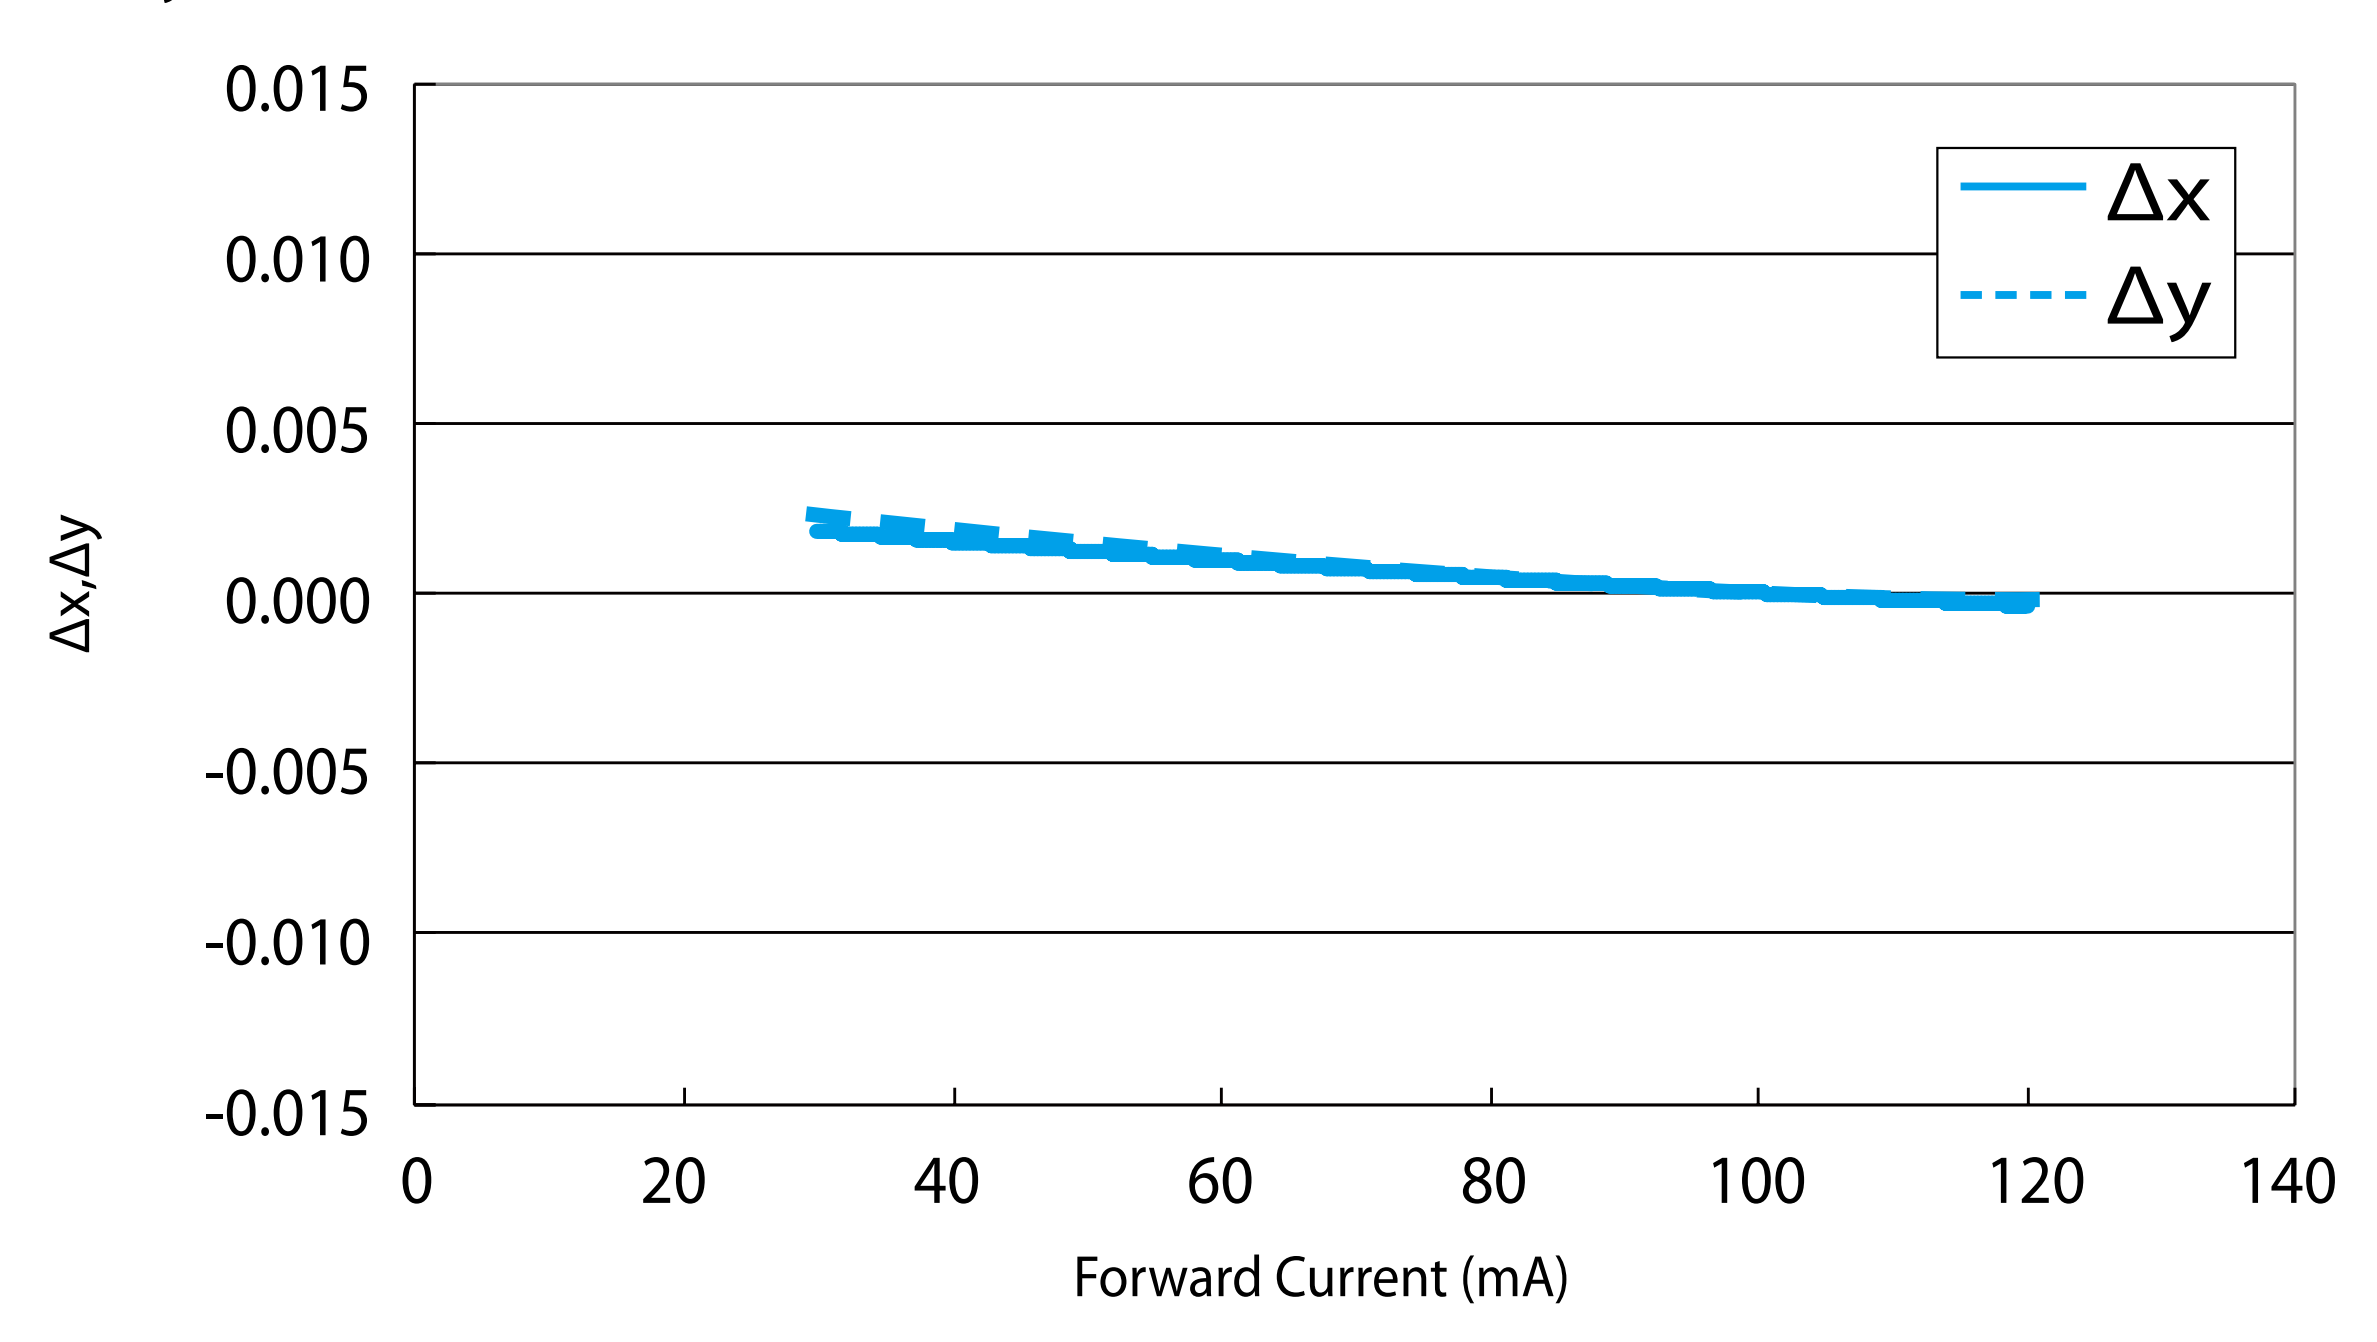


Δx,Δy vs. Junction Temperature

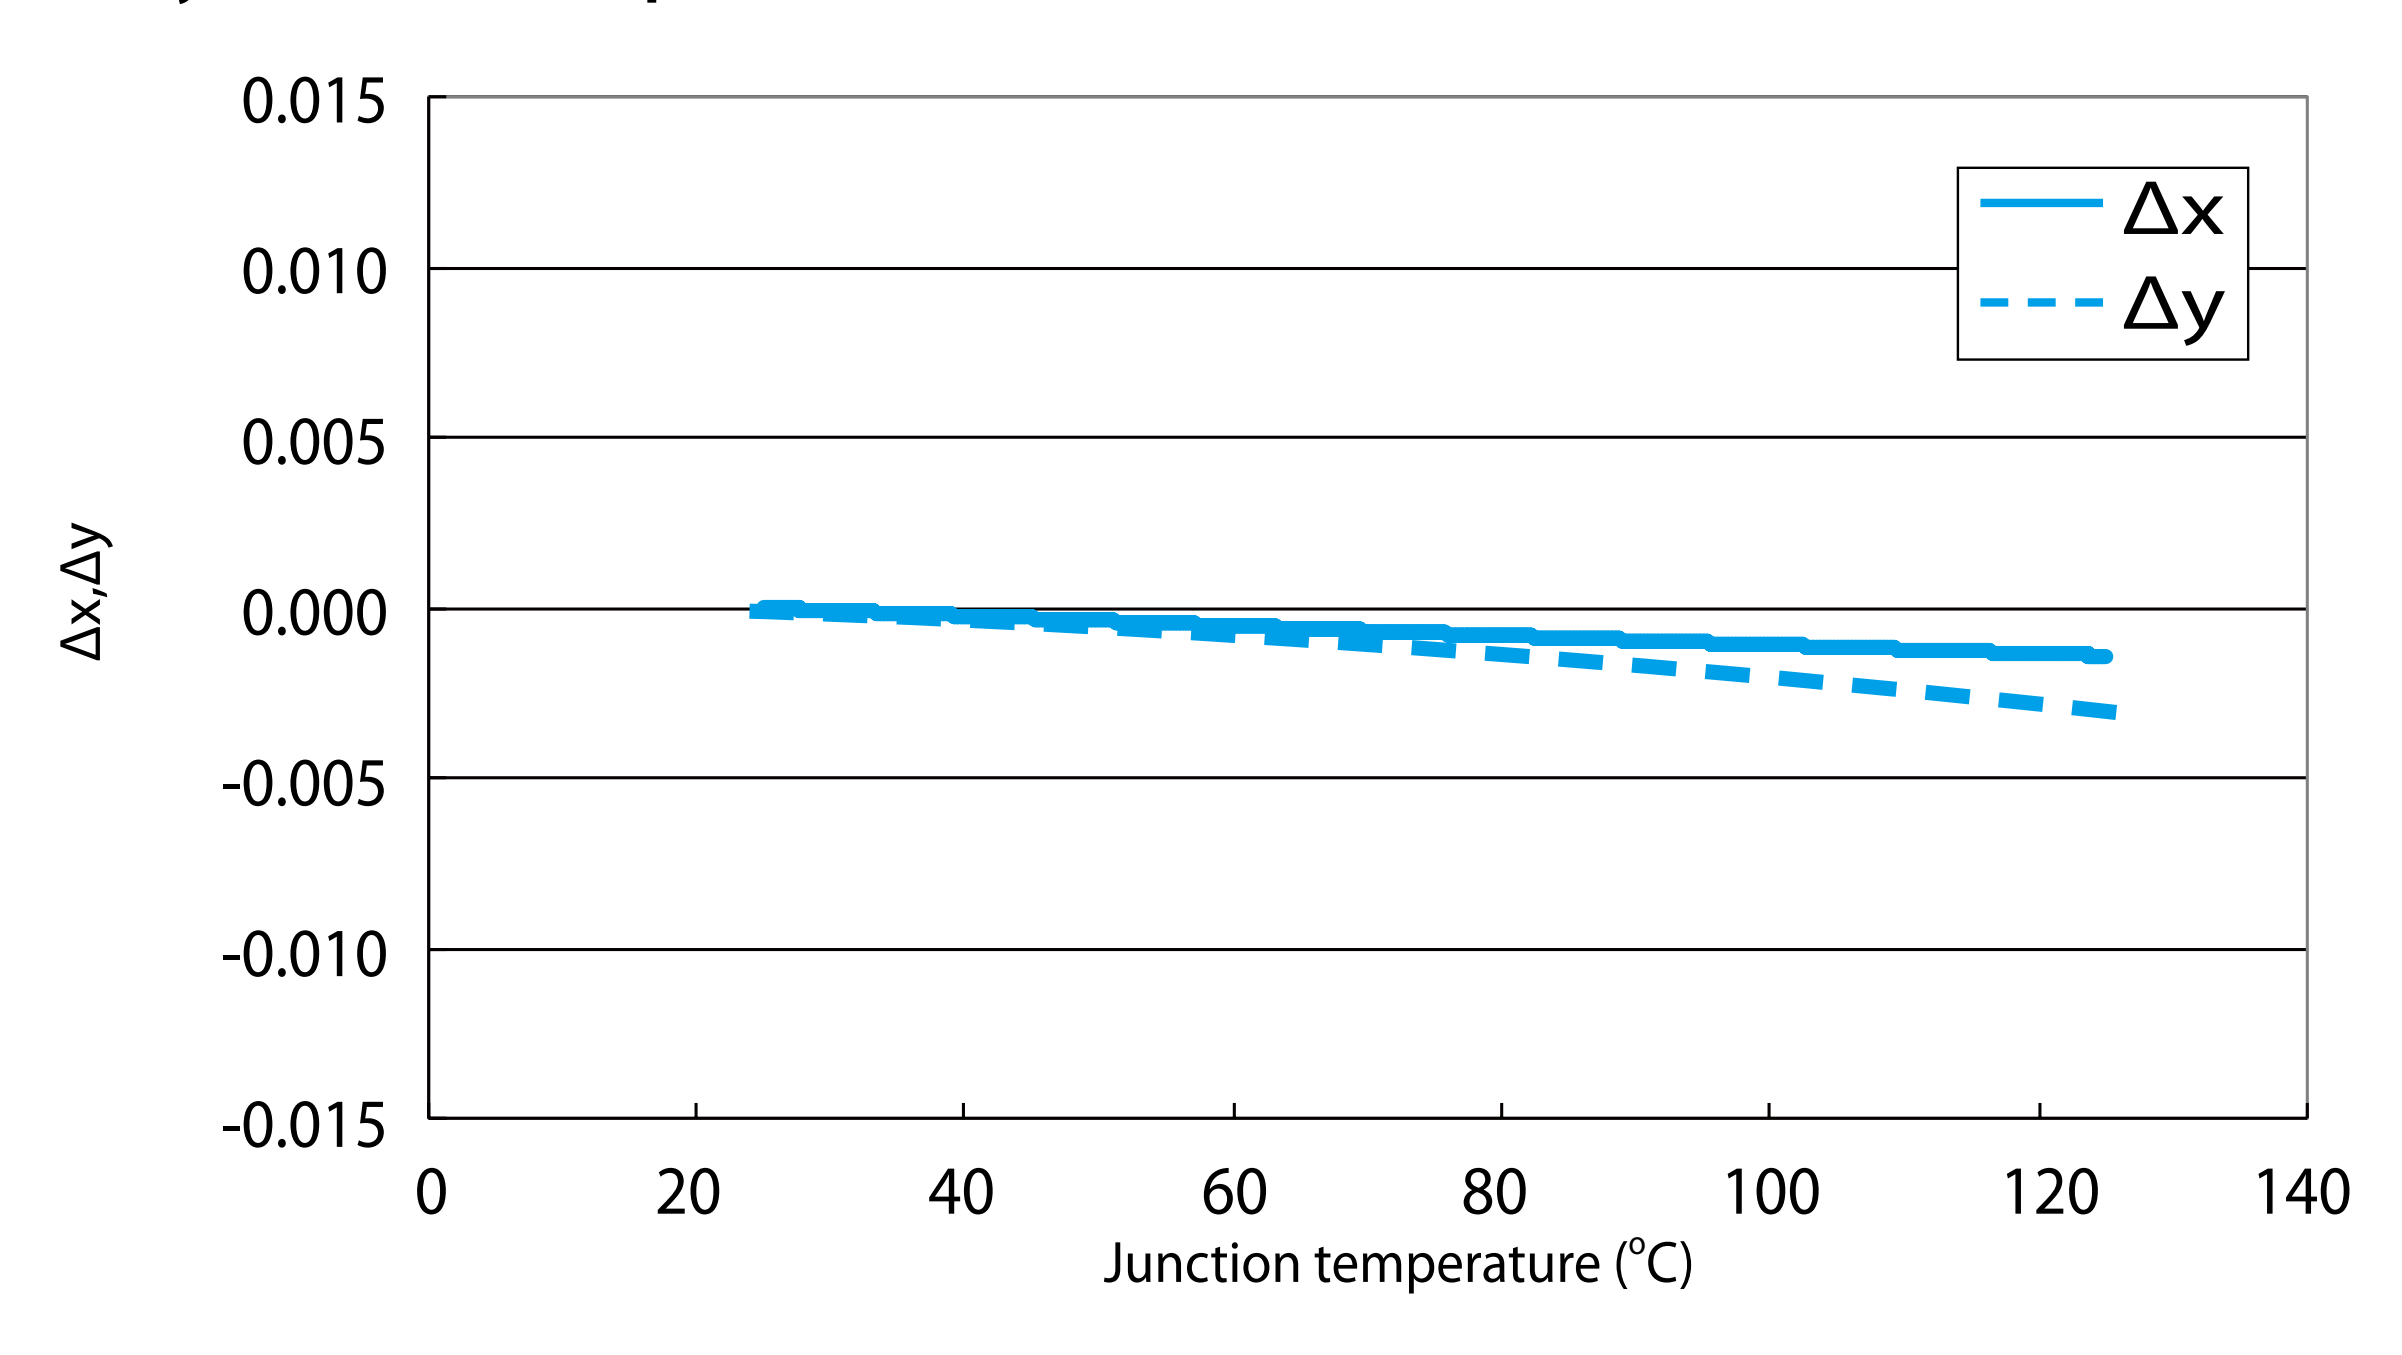




Maximum Current vs. Ambient Temperature

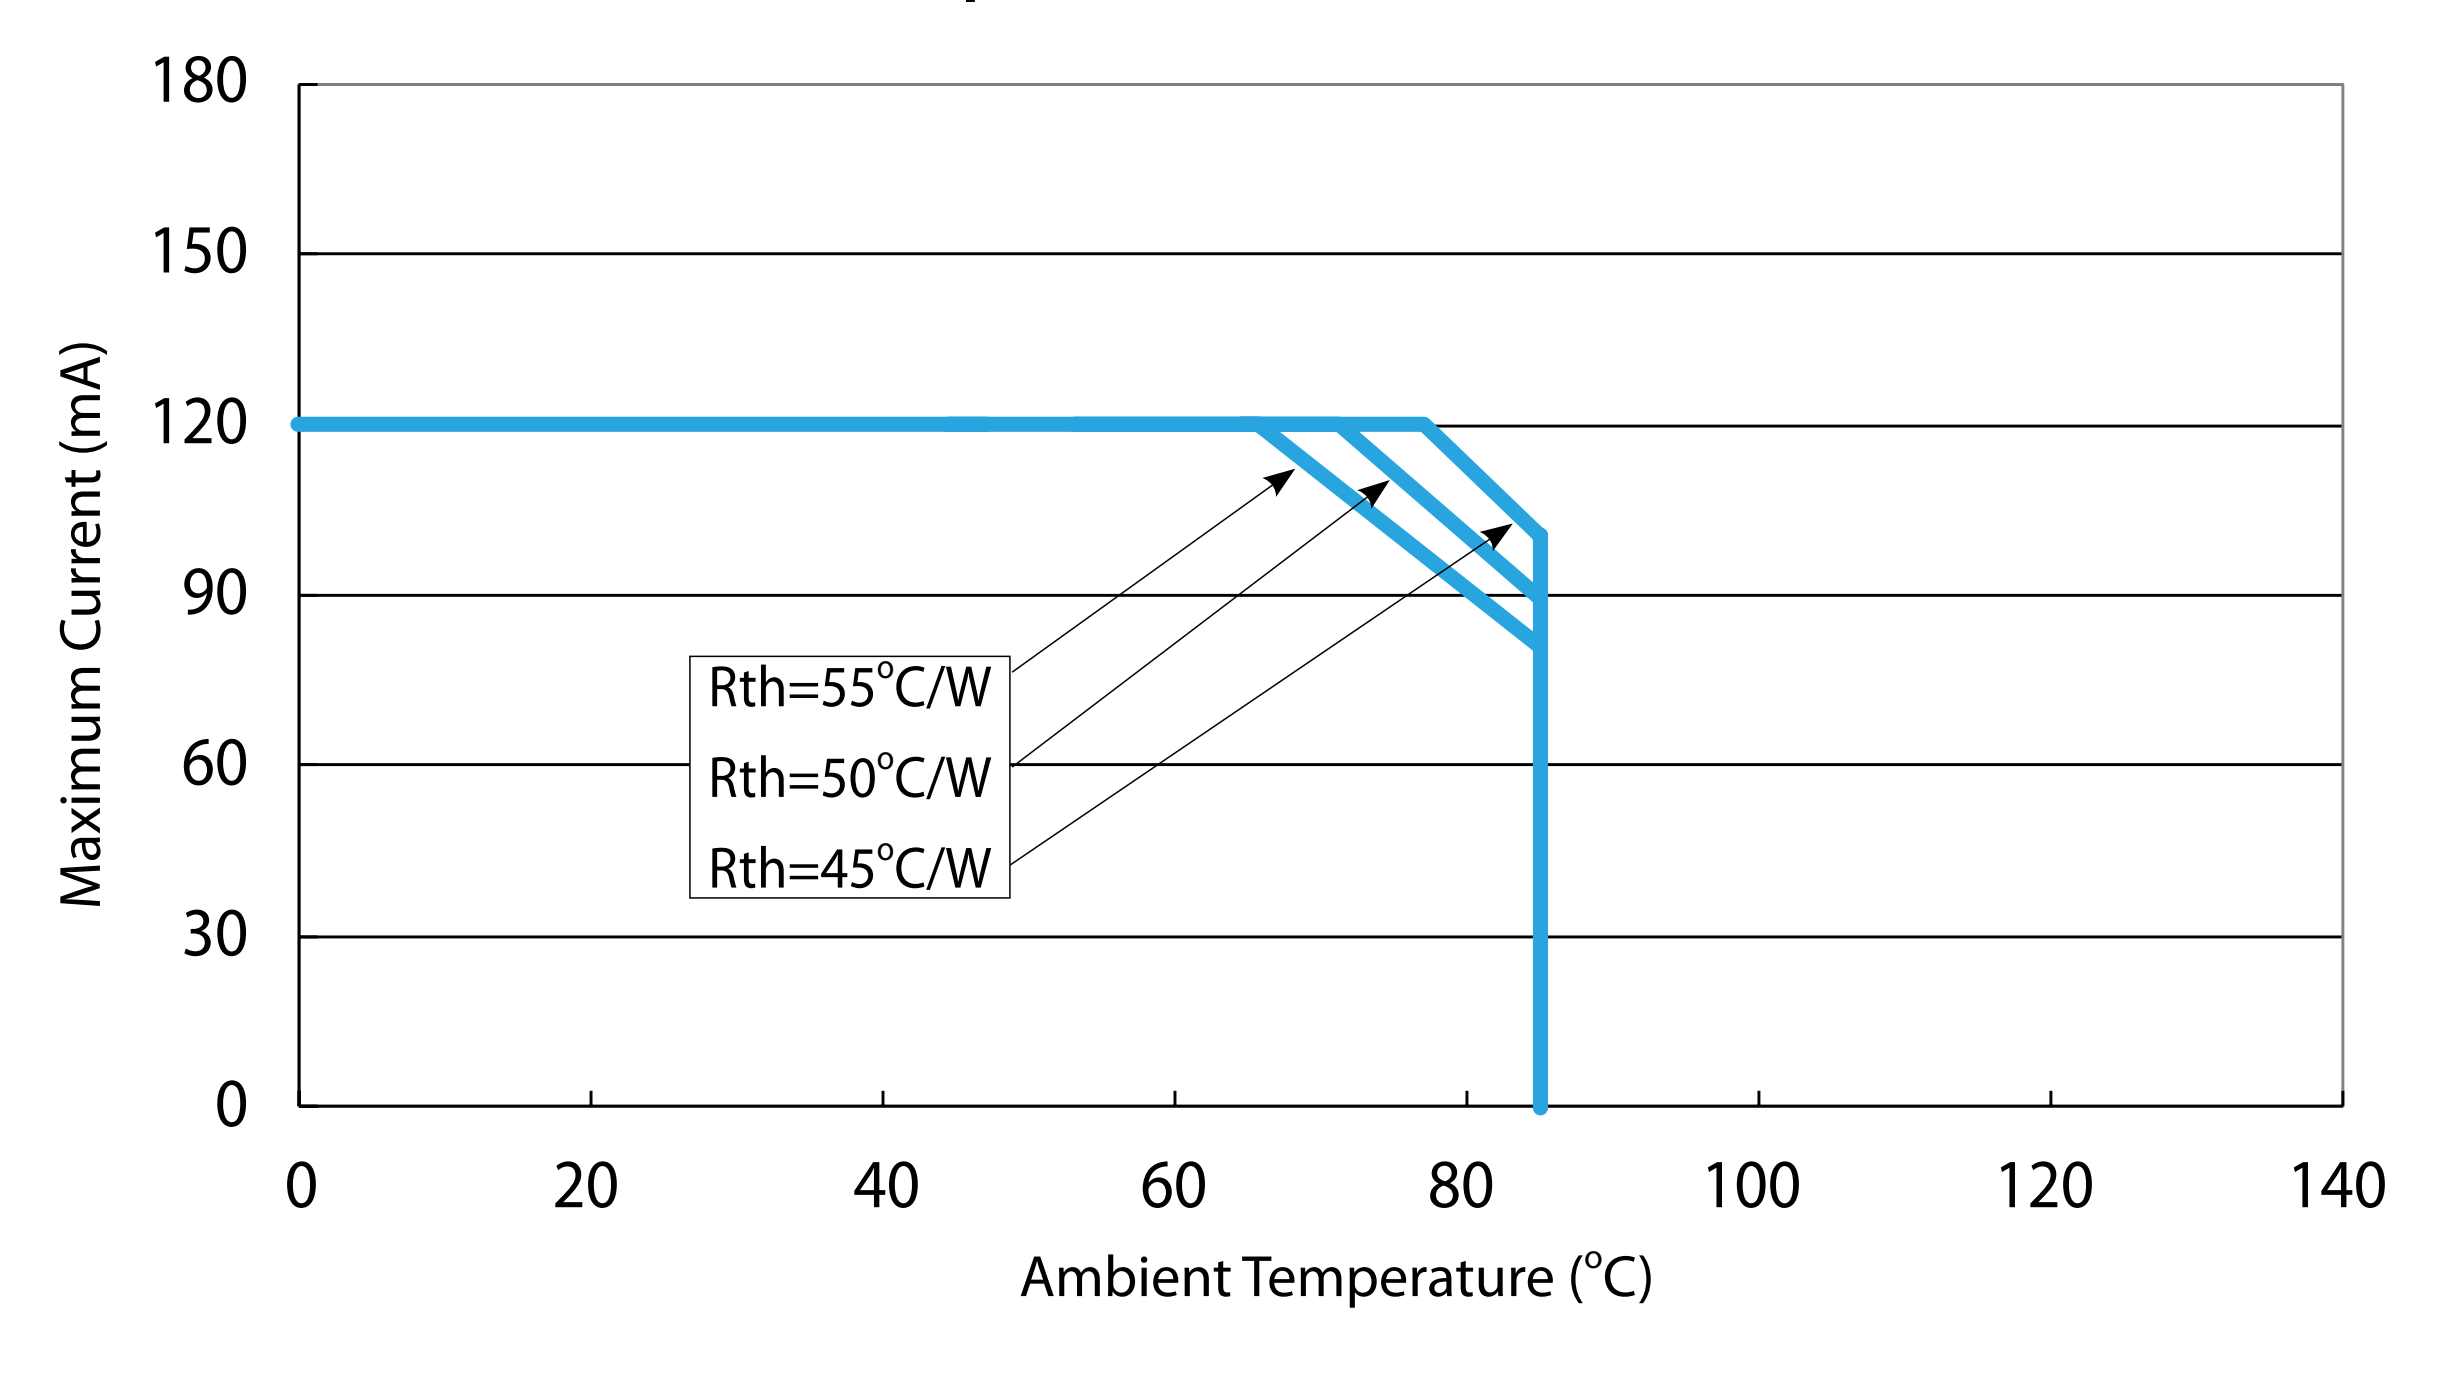



Reflow Profile

The following reflow profile is from IPC/JEDEC J-STD-020D which provided here for reference.

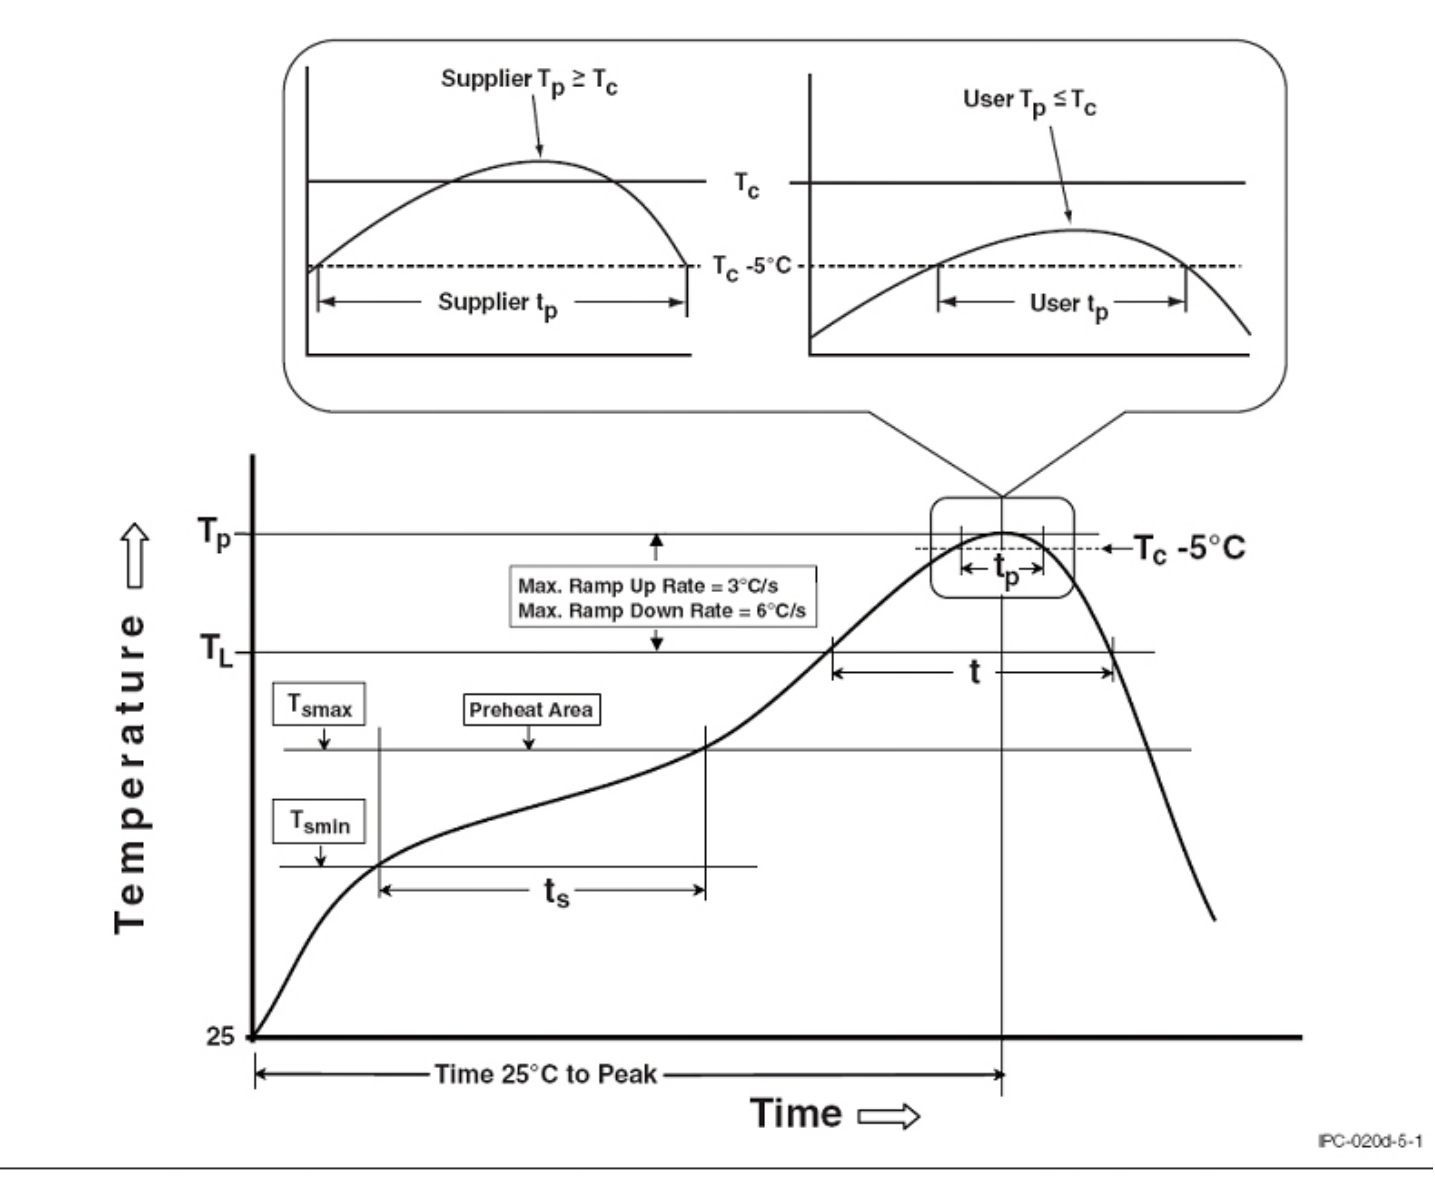

Reflow Profiles

Classification Reflow Profiles

Profile Feature	Pb-Free Assembly
Preheat & Soak Temperature min (Tsmin) Temperature max (Tsmax) Time (Tsmin to Tsmax) (ts)	150 °C 200 °C 60-120 seconds
Average ramp-up rate (Tsmax to Tp)	3 °C/second max.
Liquidous temperature (TL) Time at liquidous (tL)	217 °C 60-150 seconds
Peak package body temperature (Tp)*	255 °C ~260 °C *
Classification temperature (Tc)	260 °C
Time (tp)** within 5 °C of the specified classification temperature (Tc)	30** seconds
Average ramp-down rate (Tp to Tsmax)	6°C/second max.
Time 25°C to peak temperature	8 minutes max.

Notes:
1. * Tolerance for peak profile temperature (Tp) is defined as a supplier minimum and a user maximum.
2. ** Tolerance for time at peak profile temperature (tp) is defined as a supplier minimum and a user maximum.



Reliability


NO .	Test Item	Test Condition	Remark
1	Temperature Cycle	-40°C~100°C 30, 30, mins	100 Cycle
2	Thermal Shock	-40°C~100°C 15, 15 mins ≦10 sec	100 Cycle
3	Resistance to Soldering Heat	T_{SOL}=260°C, 30 sec	3 times
4	Moisture Resistance	25°C~65°C 90% RH 24 hrs / 1 cycle	10 Cycle
5	High-Temperature Storage	T_A=100°C	1,000 hrs
6	Humidity Heat Storage	T_A=85°C RH=85%	1,000 hrs
7	Low-Temperature Storage	T_A=-40°C	1,000 hrs
8	Operation Life test	25°C	1,000 hrs
9	High Temperature Operation Life test	85°C	1,000 hrs
10	High Humidity Heat Life Test	85°C, 85%RH	1,000 hrs
11	ON/OFF Test	30 sec ON, 30 sec OFF	1.5W times


Failure Criteria

Item	Criteria for Judgment	
	Min.	Max.
Lumen Maintenance	85%	-
Δu'v'	-	0.006
Forward Voltage	-	Initial Data x 1.1
Reverse Current	-	10 μA
Resistance to Soldering Heat	No dead lamps or visual damage	



Product Packaging Information

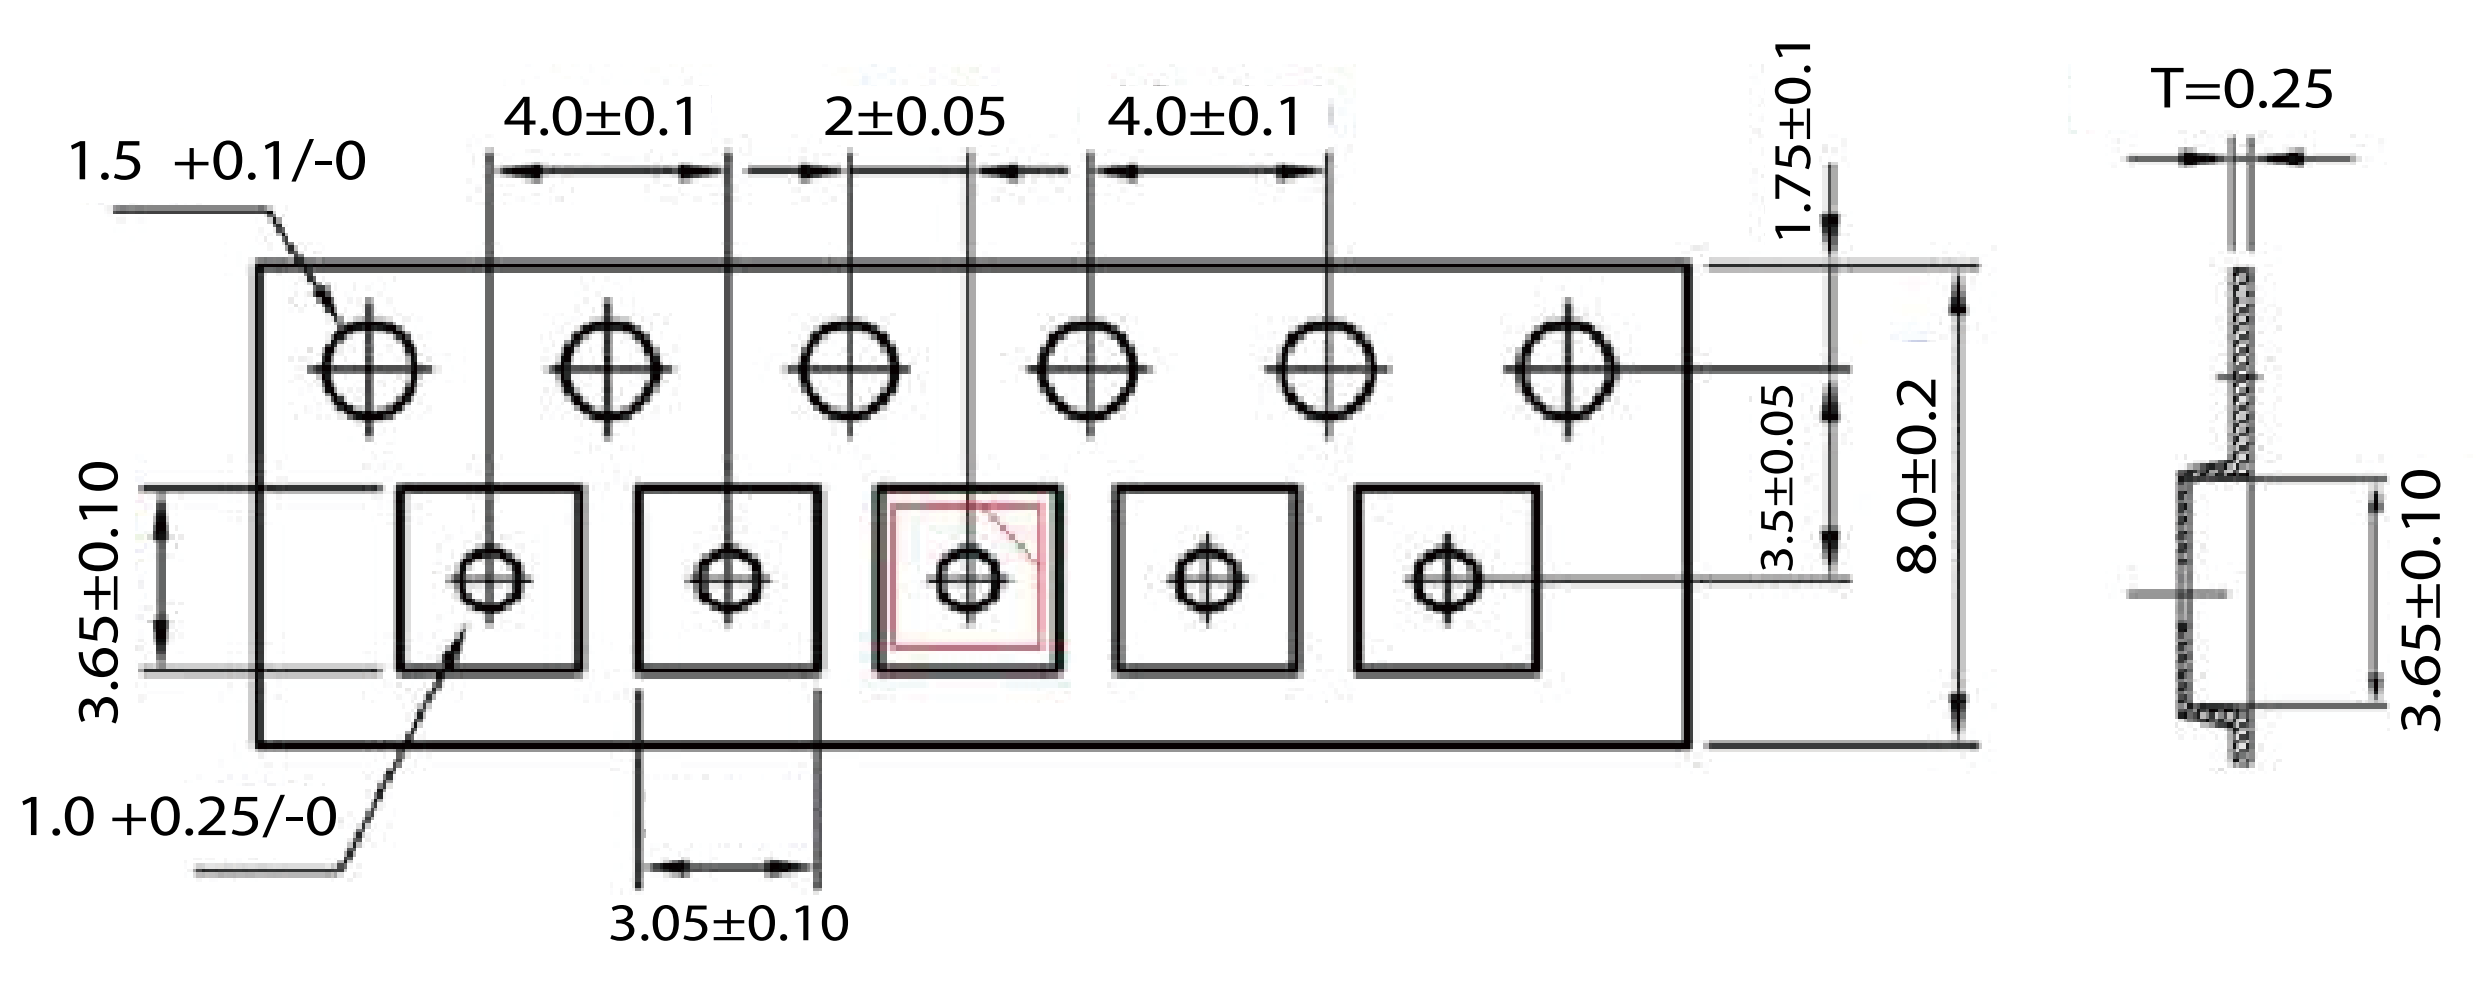

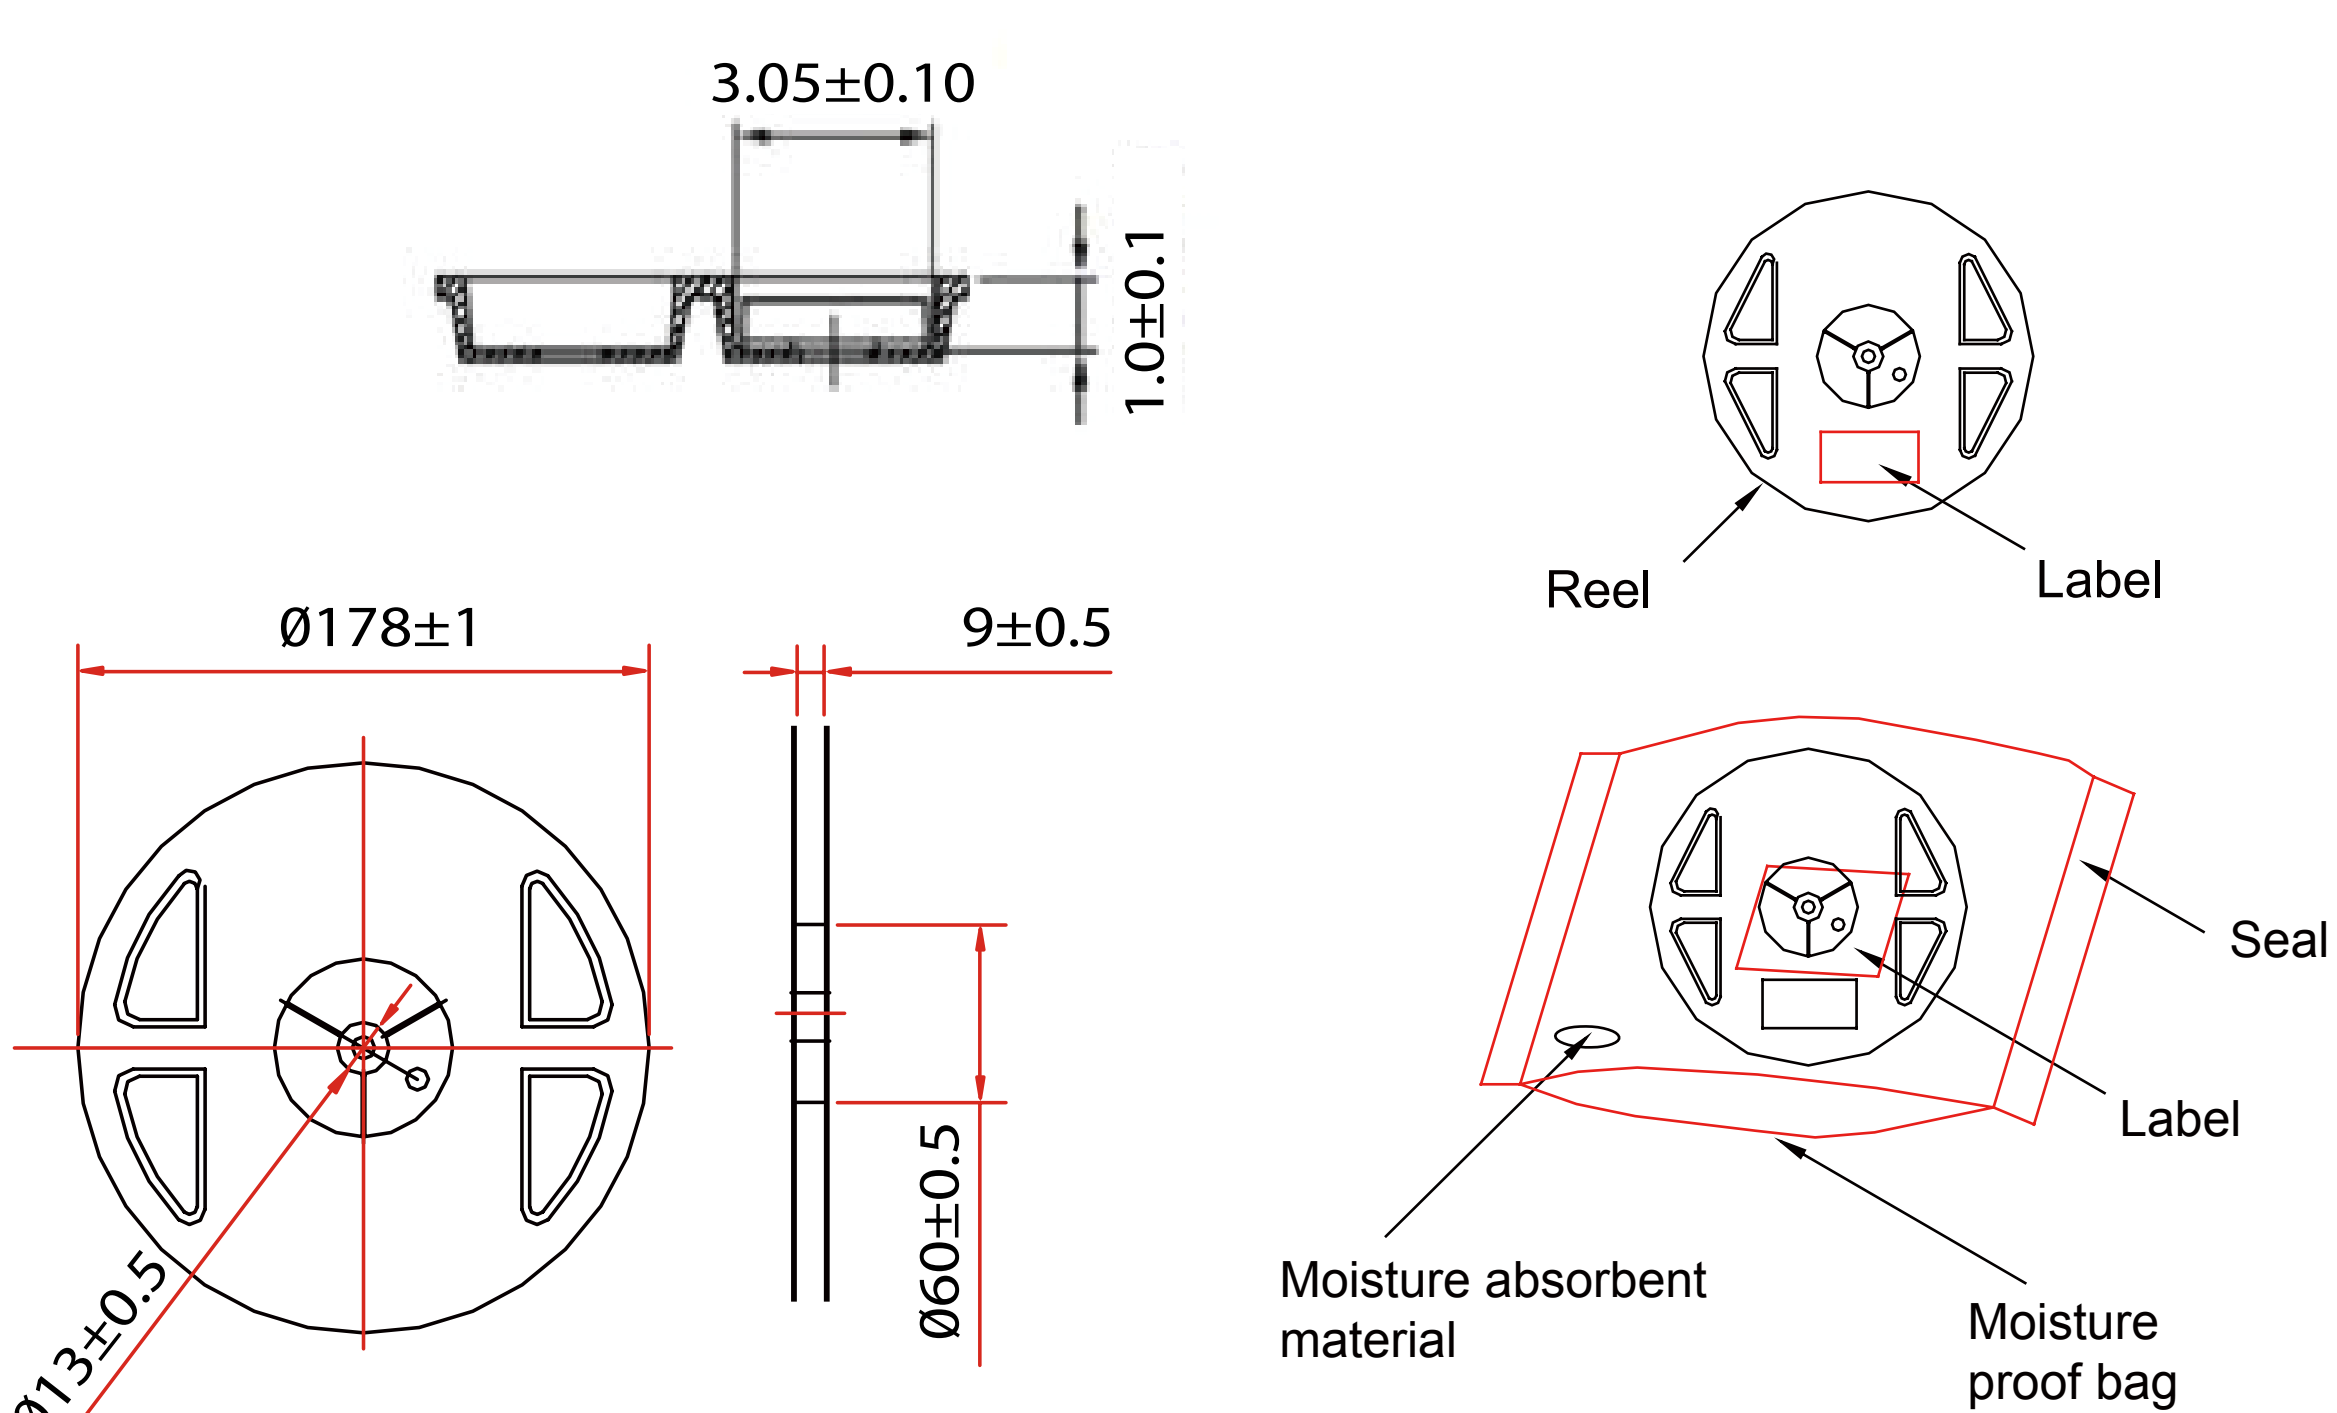

Item	Quantity	Total	Dimensions(mm)
Reel	4,000pcs	4,000pcs	R=178
Starting with 150pcs empty, and 150pcs empty at the last			



Revision History

Versions	Description	Release Date
1	Establish order code information	2015/08/14
2	1. Revise Circuit 2. Add CRI90 Order code & characteristic curve 3. Update Electro-Optical Characteristics (3000K)	2016/05/06

About Edison Opto

Edison Opto is a leading manufacturer of high power LED and a solution provider experienced in LDMS. LDMS is an integrated program derived from the four essential technologies in LED lighting applications- Thermal Management, Electrical Scheme, Mechanical Refinement, Optical Optimization, to provide customer with various LED components and modules. More Information about the company and our products can be found at www.edison-opto.com

www.edison-opto.com

For general assistance please contact:
service@edison-opto.com.tw

For technical assistance please contact:
LED.Detective@edison-opto.com.tw